

Cetis 2024

PRODUCT GUIDE



Check out our
new phone
models on
pages 22-25!



DEDICATED TO HOSPITALITY.

15 hotel phone design families with the features, functionality, and price to fit your needs in any application.



Cetis PRODUCT GUIDE

2024

<p>TELEDEX E SERIES</p>  <p>VoIP </p> <p>4</p>	<p>TELEDEX M SERIES</p>  <p>VoIP </p> <p>7</p>	<p>TELEDEX I SERIES</p>  <p>10</p>	<p>TELEDEX DIAMOND SERIES</p>  <p>14</p>
<p>TELEDEX D SERIES</p>  <p></p> <p>16</p>	<p>TELEDEX OPAL SERIES</p>  <p>18</p>	<p>TELEDEX NUGGET SERIES</p>  <p>21</p>	<p>TELEMATRIX 9700 SERIES</p>  <p>VoIP </p> <p>22</p>
<p>TELEMATRIX 3500 SERIES</p>  <p>VoIP </p> <p>24</p>	<p>TELEMATRIX 9600/9400 SERIES</p>  <p>VoIP </p> <p>26</p>	<p>TELEMATRIX 3300 SERIES</p>  <p>VoIP </p> <p>28</p>	<p>TELEMATRIX 3100 SERIES</p>  <p>30</p>
<p>TELEMATRIX RETRO SERIES</p>  <p>31</p>	<p>SCITEC AEGIS-08 SERIES</p>  <p>32</p>	<p>SCITEC EMERGENCY SERIES</p>  <p>33</p>	<p>SCITEC 2500 SERIES</p>  <p>34</p>
<p>SCITEC H3000 SERIES</p>  <p>35</p>	<p>HOTEL PRINTING SERVICES.</p>  <p>a Cetis brand</p> <p>36</p>		

TELEDEX E SERIES



VoIP VoIP AND ANALOG MODELS AVAILABLE

PROGRAMMABLE GUEST SERVICE KEYS

USB CHARGING PORTS FOR SMART DEVICES

PATENTED ONETOUCH MESSAGE RETRIEVAL



SMALL IS THE NEW BIG!

Available in single and two-line, analog, VoIP, corded, and cordless configurations. Micro-footprint Teledex E Series phones have created an entirely new hotel guest room telephone category. Originally designed to meet the limited space requirements aboard cruise ships, E Series phones require less room on the hotel guest room desk and nightstand, and consume less energy in the manufacturing process, so the impact on the environment is smaller as well.

- Single or two-line speakerphones
- Patented OneTouch voicemail retrieval
- Dual Neon/LED message-waiting light
- Electronic 3-way conference (two-line models)
- LED indicator lights for Speaker, Mute, & Hold keys, Line 1 & Line 2 keys (2-line models only)
- Available in Ash or Black

E SERIES VOIP CORDED

- Up to seven (7) configurable Guest Service Keys
- Dual Port (10/100) for HSIA
- ETrim available

E SERIES ANALOG CORDED

- 4, 5, 8, 10, or 12 configurable Guest Service Keys
- ETrim available

E SERIES VOIP CORDLESS

- Available Frequencies: 1.8 GHz and 1.9 GHz
- Supports up to five handsets, including one on the base and three remotes
- 4, 5, or 7 configurable Guest Service Keys
- HAC/VCH (ADA) compliant handset volume boost
- Dual Port (10/100) for HSIA
- RediDock available

E SERIES ANALOG CORDLESS

- Available Frequencies: 1.8 GHz and 1.9 GHz
- Supports up to four handsets, including one on the base and three remotes
- 4, 5, 8, 10, or 12 configurable Guest Service Keys
- HAC/VCH (ADA) compliant handset volume boost
- RediDock available



Teledex E Series hotel phones are 40% smaller than standard guest room telephones.



E SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Footprint (Desk):	4.5" (11.43cm) (w) x 8" (20.32cm) (l) x 3.63" (9.22cm) (d) (max height with desk stand)
Footprint (Wall):	4.5" (11.43cm) (w) x 8" (20.32cm) (l) x 1.5" (3.81cm) (d) (depth from wall mount)
Weight:	VoIP: 2.0 lbs. (900g) / Analog: 1.4 lbs. (0.64kg)
Weight (ETrim/RediDock):	VoIP: 12oz. (340g) / Analog: 10oz. (290g)
Frequency (Cordless):	1.8 GHz and 1.9 GHz
Power (VoIP):	Power over Ethernet (POE) 802.3af Compliant
Power (Analog):	Wall Adapter (USB & Cordless) / Line (Corded)
Power (Handset Kit):	Remote charging station includes Handset w/ Battery & AC Adapter
Operating Voltage (Analog):	24-56 VDC Non-Polarity
Standby Time (Cordless):	10 days
Talk Time (Cordless):	6 hours
Range (Cordless):	100ft (30m)
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications (VoIP):	FCC Part 15 Support B: 2009
FCC Specifications (Analog):	Meets or exceeds Part 68, FCC Part 15 & UL 1459 Ref.
Safety Standard:	UL - 60950-1 2nd edition ADA/HAC
RFCs (VoIP):	3261 (SIP), 3842 (SIP Subscribe), 2833 (SIP Info)
Flash Timing (Analog):	600ms
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Line Cord (Cordless & IP):	RJ45 Line Cord - 12ft (3.66m)
Packaging:	10 per carton
Packaging (RediDock):	10 per carton
Packaging (Etrim):	20 per carton

PACKAGE CONTENTS

- Handset
- Base Unit
- AC Adapter (Cordless & USB)
- 10' foot Handset Coil Cord
- 12' Line Cord
- Faceplate & Overlay



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

PART NUMBERS

VOIP CORDLESS 1.9GHZ

E103IP - 4GSK, 1L, MW, Spkr	EV11319S4D3(Blk)/EV21319S4D3(Ash)
E103IP - 5GSK, 1L, MW, Spkr	EV11319S5D3(Blk)/EV21319S5D3(Ash)
E103IP - 7GSK, 1L, MW, Spkr	EV11319S7D3(Blk)/EV21319S7D3
E103IP - RediDock, 1L, USB	EV11319N0HKU3(Blk)/EV21319N0HKU3(Ash)
E203IP - 4GSK, 2L, MW, Spkr	EV12319S4D3(Blk)/EV22319S4D3(Ash)
E203IP - 5GSK, 2L, MW, Spkr	EV12319S5D3(Blk)/EV22319S5D3(Ash)
E203IP - 7GSK, 2L, MW, Spkr	EV12319S7D3(Blk)/EV22319S7D3(Ash)
E203IP - RediDock, 2L, USB	EV12319N0HKU3(Blk)/EV22319N0HKU3(Ash)

VOIP CORDLESS 1.8GHZ

E103IP - 4GSK, 1L, MW, Spkr	EV11318S4D3(Blk)/EV21318S4D3(Ash)
E103IP - 5GSK, 1L, MW, Spkr	EV11318S5D3(Blk)/EV21318S5D3(Ash)
E103IP - 7GSK, 1L, MW, Spkr	EV11318S7D3(Blk)/EV21318S7D3(Ash)
E103IP - RediDock, 1L, USB	EV11318N0HKU3(Blk)/EV21318N0HKU3(Ash)
E203IP - 4GSK, 2L, MW, Spkr	EV12318S4D3(Blk)/EV22318S4D3
E203IP - 5GSK, 2L, MW, Spkr	EV12318S5D3(Blk)/EV22318S5D3
E203IP - 7GSK, 2L, MW, Spkr	EV12318S7D3(Blk)/EV22318S7D3
E203IP - RediDock, 2L, USB	EV12318N0HKU3(Blk)/EV22318N0HKU3

ANALOG CORDLESS 1.9GHZ

E103 - 4GSK, 1L, MW, Spkr	EA011319S04D(Blk) / EA021319S04D
E103 - 5GSK, 1L, MW, Spkr	EA011319S05D(Blk) / EA021319S05D
E103 - 8GSK, 1L, MW, Spkr	EA011319S08D(Blk) / EA021319S08D
E103 - 10GSK, 1L, MW, Spkr	EA011319S10D(Blk) / EA021319S10D
E103 - 12GSK, 1L, MW, Spkr	EA011319S12D(Blk) / EA021319S12D
E103 - RediDock, 1L, USB	EA11319N0HKU(Blk) / EA21319N0HKU
E203 - 4GSK, 2L, MW, Spkr	EA012319S04D(Blk) / EA022319S04D
E203 - 5GSK, 2L, MW, Spkr	EA012319S05D(Blk) / EA022319S05D
E203 - 7GSK, 2L, MW, Spkr	EA012319S08D(Blk) / EA022319S08D
E203 - 10GSK, 2L, MW, Spkr	EA012319S10D(Blk) / EA022319S10D
E203 - 12GSK, 2L, MW, Spkr	EA012319S12D(Blk) / EA022319S12D
E203 - RediDock, 2L, USB	EA12319N0HKU(Blk) / EA22319N0HKU

VOIP CORDLESS 1.9GHZ (WITH USB)

E103IP - 4GSK, 1L, MW, Spkr	EV11319S4DU3(Blk)/EV21319S4DU3 (Ash)
E103IP - 5GSK, 1L, MW, Spkr	EV11319S5DU3(Blk)/EV21319S5DU3 (Ash)
E103IP - 7GSK, 1L, MW, Spkr	EV11319S7DU3(Blk)/EV21319S7DU3 (Ash)
E103IP - RediDock, 1L,	EV11319N0HKU3(Blk)/EV21319N0HKU3 (Ash)
E203IP - 4GSK, 2L, MW, Spkr	EV12319S4DU3(Blk)/EV22319S4DU3 (Ash)
E203IP - 5GSK, 2L, MW, Spkr	EV12319S5DU3(Blk)/EV22319S5DU3 (Ash)
E203IP - 7GSK, 2L, MW, Spkr	EV12319S7DU3(Blk)/EV22319S7DU3 (Ash)
E203IP - RediDock, 2L,	EV12319N0HKU3(Blk)/EV22319N0HKU3 (Ash)

(Continued Next Page)...



ANALOG CORDLESS 1.8GHZ

E103 – 4GSK, 1L, MW, Spkr	EA011318S04D(Blk)/EA021318S04D(Ash)
E103 – 5GSK, 1L, MW, Spkr	EA011318S05D(Blk)/EA021318S05D(Ash)
E103 – 8GSK, 1L, MW, Spkr	EA011318S08D(Blk)/EA021318S08D(Ash)
E103 – 10GSK, 1L, MW, Spkr	EA011318S10D(Blk)/EA021318S10D(Ash)
E103 – 12GSK, 1L, MW, Spkr	EA011318S12D(Blk)/EA021318S12D(Ash)
E103 – RediDock, 1L, USB	EA11318N0HKU(Blk)/EA21318N0HKU(Ash)
E203 – 4GSK, 2L, MW, Spkr	EA012318S04D(Blk)/EA022318S04D(Ash)
E203 – 5GSK, 2L, MW, Spkr	EA012318S05D(Blk)/EA022318S05D(Ash)
E203 – 7GSK, 2L, MW, Spkr	EA012318S08D(Blk)/EA022318S08D(Ash)
E203 – 10GSK, 2L, MW, Spkr	EA012318S10D(Blk)/EA022318S10D(Ash)
E203 – 12GSK, 2L, MW, Spkr	EA012318S12D(Blk)/EA022318S12D(Ash)
E203 – RediDock, 2L, USB	EA12318N0HKU(Blk)/EA22318N0HKU(Ash)

VOIP CORDED

E100IP – Lobby 1L	EV10N0L3(Blk)/EV20N0L3(Ash)
E100IP – Basic 1L, Spkr	EV011000S00T3(Blk)/EV021000S00T3(Ash)
E100IP – 4GSK 1L, MW, Spkr	EV110S4D3(Blk)/EV210S4D3(Ash)
E100IP – 5GSK 1L, MW, Spkr	EV110S5D3(Blk)/EV210S5D3(Ash)
E100IP – 7GSK 1L, MW, Spkr	EV110S7D3(Blk)/EV210S7D3(Ash)
E100IP – ETrim 1L, Trimline	EV110N0T3(Blk)/EV210N0T3(Ash)
E200IP – Basic 2L, Spkr	EV012000S00T3(Blk)/EV022000S00T3(Ash)
E200IP – 4GSK 2L, MW, Spkr	EV120S4D3(Blk)/EV220S4D3(Ash)
E200IP – 5GSK 2L, MW, Spkr	EV120S5D3(Blk)/EV220S5D3(Ash)
E200IP – 7GSK 2L, MW, Spkr	EV120S7D3(Blk)/EV220S7D3(Ash)
E200IP – ETrim 2L, Trimline	EV120N0T3(Blk)/EV220N0T3(Ash)

ANALOG CORDED

E100 – Lobby 1L	EA011000N00L(Blk)/EA021000N00L(Ash)
E100 – Basic 1L, Spkr	EA011000S00T(Blk)/EA021000S00T(Ash)
E100 – 4GSK 1L, MW, Spkr	EA011000S04D(Blk)/EA021000S04D(Ash)
E100 – 5GSK 1L, MW, Spkr	EA011000S05D(Blk)/EA021000S05D(Ash)
E100 – 8GSK 1L, MW, Spkr	EA011000S08D(Blk)/EA021000S08D(Ash)
E100 – 10GSK 1L, MW, Spkr	EA011000S10D(Blk)/EA021000S10D(Ash)
E100 – 12GSK 1L, MW, Spkr	EA011000S12D(Blk)/EA021000S12D(Ash)
E100 – ETrim 1L, Trimline	EA110N0T(Blk)/EA210N0T(Ash)
E200 – Basic 2L, Spkr	EA012000S00T(Blk)/EA022000S00T(Ash)
E200 – 4GSK 2L, MW, Spkr	EA012000S04D(Blk)/EA022000S04D(Ash)
E200 – 5GSK 2L, MW, Spkr	EA012000S05D(Blk)/EA022000S05D(Ash)
E200 – 8GSK 2L, MW, Spkr	EA012000S08D(Blk)/EA022000S08D(Ash)
E200 – 10GSK 2L, MW, Spkr	EA012000S10D(Blk)/EA022000S10D(Ash)
E200 – 12GSK 2L, MW, Spkr	EA012000S12D(Blk)/EA022000S12D(Ash)
E200 – ETrim 2L, Trimline	EA120N0T(Blk)/EA220N0T(Ash)

VOIP CORDED (WITH USB)

E100IP – 4GSK 1L, MW, USB, Spkr	EV110S4DU3(Blk)/EV210S4DU3(Ash)
E100IP – 5GSK 1L, MW, USB, Spkr	EV110S5DU3(Blk)/EV210S5DU3(Ash)
E100IP – 7GSK 1L, MW, USB, Spkr	EV110S7DU3(Blk)/EV210S7DU3(Ash)
E200IP – 4GSK 2L, MW, USB, Spkr	EV120S4DU3(Blk)/EV220S4DU3(Ash)
E200IP – 5GSK 2L, MW, USB, Spkr	EV120S5DU3(Blk)/EV220S5DU3(Ash)
E200IP – 7GSK 2L, MW, USB, Spkr	EV120S7DU3(Blk)/EV220S7DU3(Ash)

VOIP CORDLESS 1.8GHZ (WITH USB)

E103IP – 4GSK, 1L, MW, USB, Spkr	EV11318S4DU3(Blk)/EV21318S4DU3(Ash)
E103IP – 5GSK, 1L, MW, USB, Spkr	EV11318S5DU3(Blk)/EV21318S5DU3(Ash)
E103IP – 7GSK, 1L, MW, USB, Spkr	EV11318S7DU3(Blk)/EV21318S7DU3(Ash)
E103IP – RediDock, 1L, USB	EV11318N0HKU3(Blk)/EV21318N0HKU3(Ash)
E203IP – 4GSK, 2L, MW, USB, Spkr	EV12318S4DU3(Blk)/EV22318S4DU3(Ash)
E203IP – 5GSK, 2L, MW, USB, Spkr	EV12318S5DU3(Blk)/EV22318S5DU3(Ash)
E203IP – 7GSK, 2L, MW, USB, Spkr	EV12318S7DU3(Blk)/EV22318S7DU3(Ash)
E203IP – RediDock, 2L, USB	EV12318N0HKU3(Blk)/EV22318N0HKU3(Ash)

ANALOG CORDLESS 1.9GHZ (WITH USB)

E103 – 4GSK, 1L, MW, USB, Spkr	EA11319S4DU(Blk)/EA21319S4DU(Ash)
E103 – 5GSK, 1L, MW, USB, Spkr	EA11319S5DU(Blk)/EA21319S5DU(Ash)
E103 – 8GSK, 1L, MW, USB, Spkr	EA11319S8DU(Blk)/EA21319S8DU(Ash)
E103 – 10GSK, 1L, MW, USB, Spkr	EA11319S10DU(Blk)/EA21319S10DU(Ash)
E103 – 12GSK, 1L, MW, USB, Spkr	EA11319S12DU(Blk)/EA21319S12DU(Ash)
E103 – RediDock, 1L, USB	EA11319N0HKU(Blk)/EA21319N0HKU(Ash)
E203 – 4GSK, 2L, MW, USB, Spkr	EA12319S4DU(Blk)/EA22319S4DU(Ash)
E203 – 5GSK, 2L, MW, USB, Spkr	EA12319S5DU(Blk)/EA22319S5DU(Ash)
E203 – 7GSK, 2L, MW, USB, Spkr	EA12319S8DU(Blk)/EA22319S8DU(Ash)
E203 – 10GSK, 2L, MW, USB, Spkr	EA12319S10DU(Blk)/EA22319S10DU(Ash)
E203 – 12GSK, 2L, MW, USB, Spkr	EA12319S12DU(Blk)/EA22319S12DU(Ash)
E203 – RediDock, 2L, USB	EA12319N0HKU(Blk)/EA22319N0HKU(Ash)

ANALOG CORDLESS 1.8GHZ (WITH USB)

E103 – 4GSK, 1L, MW, USB, Spkr	EA11318S4DU(Blk)/EA21318S4DU
E103 – 5GSK, 1L, MW, USB, Spkr	EA11318S5DU(Blk)/EA21318S5DU
E103 – 8GSK, 1L, MW, USB, Spkr	EA11318S8DU(Blk)/EA21318S8DU
E103 – 10GSK, 1L, MW, USB, Spkr	EA11318S10DU(Blk)/EA21318S10DU
E103 – 12GSK, 1L, MW, USB, Spkr	EA11318S12DU(Blk)/EA21318S12DU
E103 – RediDock, 1L, USB	EA11318N0HKU(Blk)/EA21318N0HKU
E203 – 4GSK, 2L, MW, USB, Spkr	EA12318S4DU(Blk)/EA22318S4DU
E203 – 5GSK, 2L, MW, USB, Spkr	EA12318S5DU(Blk)/EA22318S5DU
E203 – 7GSK, 2L, MW, USB, Spkr	EA12318S8DU(Blk)/EA22318S8DU
E203 – 10GSK, 2L, MW, USB, Spkr	EA12318S10DU(Blk)/EA22318S10DU
E203 – 12GSK, 2L, MW, USB, Spkr	EA12318S12DU(Blk)/EA22318S12DU
E203 – RediDock, 2L, USB	EA12318N0HKU(Blk)/EA22318N0HKU

ANALOG CORDED (WITH USB)

E100 – 4GSK 1L, MW, USB, Spkr	EA110S4DU(Blk)/EA210S4DU
E100 – 5GSK 1L, MW, USB, Spkr	EA110S5DU(Blk)/EA210S5DU
E100 – 8GSK 1L, MW, USB, Spkr	EA110S8DU(Blk)/EA210S8DU
E100 – 10GSK 1L, MW, USB, Spkr	EA110S10DU(Blk)/EA210S10DU
E100 – 12GSK 1L, MW, USB, Spkr	EA110S12DU(Blk)/EA210S12DU
E200 – 4GSK 2L, MW, USB, Spkr	EA120S4DU(Blk)/EA220S4DU
E200 – 5GSK 2L, MW, USB, Spkr	EA120S5DU(Blk)/EA220S5DU
E200 – 8GSK 2L, MW, USB, Spkr	EA120S8DU(Blk)/EA220S8DU
E200 – 10GSK 2L, MW, USB, Spkr	EA120S10DU(Blk)/EA220S10DU
E200 – 12GSK 2L, MW, USB, Spkr	EA120S12DU(Blk)/EA220S12DU



TELEDEX M SERIES



PROGRAMMABLE GUEST SERVICE KEYS



OPTIONAL ALARM CLOCK



USB CHARGING PORTS FOR SMART DEVICES



PATENTED ONETOUCH MESSAGE RETRIEVAL

Black 

MORE THAN JUST A TELEPHONE.

M Series analog and VoIP corded and cordless phones gives guests the ability to charge smart devices via USB charging. An optional high performance stereo sound system replaces stand-alone audio playback devices in the room to save space, and empower enhanced speakerphone calls and conferencing. Available with 5 or 10 programmable guest service keys, patented OneTouch voicemail retrieval and customizable faceplate.

USB CHARGING

Two high-current USB charging ports support devices up to 2.1 Amp, including most tablets and smartphones.

ONETOUCH VOICEMAIL RETRIEVAL

Automatically engages the phone's speaker and auto-dials voicemail which enables guests to check messages hands-free.

Matching MTRM Trimline available.

M SERIES CORDED

- Single or two-line speakerphone
- 5 or 10 programmable guest service keys
- Patented OneTouch voicemail retrieval
- 2 Side USB power ports for device charging (2.1 Amp)
- HAC/VCH (ADA) compliant handset volume boost
- Dual neon/LED message-waiting light
- Electronic three-way conferencing (two-line models)
- Available in black (with custom faceplate options)
- Custom faceplate options available (MOQ required)



M SERIES TRIMLINE CORDED

- Single or two-line phones
- HAC/VCH (ADA) compliant handset volume boost
- Dual neon/LED message-waiting light

M SERIES CORDLESS

- Available Frequencies: 1.8 GHz and 1.9 GHz
- Supports up to four handsets, including one on the base and three remotes
- 5, or 10 configurable Guest Service Keys
- HAC/VCH (ADA) compliant handset volume boost
- EasyAccess™ data port
- RediDock available



M SERIES SPECIFICATIONS

Standard Colors:	Black
Footprint:	8.56" (217.55mm) (l) x 3.64" (92.5mm) (h) x 5.8" (147.2mm) (w)
Weight:	3.3 lbs. (1527g)
Power Supply:	Remote charging station includes Handset w/ Battery & AC Adapter
Operating Voltage (Analog):	24 to 56 VDC Non-Polarity
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications (VoIP):	FCC Part 15 Support B: 2009
FCC Specifications (Analog):	Meets or exceeds Part 68, FCC Part 15 & UL 1459 Ref.
Safety Standard:	UL - 60950-1 2nd edition ADA/HAC
Ringer Equivalence:	Z (Use only behind PBX)
Flash Timing (Analog):	600ms
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Line Cord (VoIP):	RJ45 Line Cord - 12ft (3.66m)
Packaging:	10 per carton
Packaging (RediDock):	10 per carton
Packing (MTrim):	20 per carton

PACKAGE CONTENTS

- Handset
- Base Unit
- AC Adapter
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-14 Line Cord
- Faceplate & Overlay



Matching Cordless RediDock available.



Teledex M Series Analog models feature a 5-year limited warranty.



Teledex M Series Bluetooth models feature a 2-year limited warranty.



Teledex M Series VoIP models feature a 1-year limited warranty.

M SERIES FACEPLATE UPGRADE

Charcoal and Custom Color Faceplate Options: MOQ 500 units, 15% spares, 50% down payment with order and \$9.99 up charge per phone. Lead time to be determined at time of order. (Typical lead time is 12 weeks.)



PART NUMBERS

SINGLE-LINE VoIP 1.9GHz CORDLESS

M103IP5 (5GSK, Spkr)	MV11319S5DU3
M103IP53 (5/3GSK, Spkr)	MV11319S53DU3
M103IP56 (5/6GSK, Spkr)	MV11319S56DU3
M103IP10 (10GSK, Spkr)	MV11319S10DU3
M103IP103 (10/3GSK, Spkr)	MV11319S103DU3
M103IP106 (10/6GSK, Spkr)	MV11319S106DU3
M103IPHDKT (0GSK, Spkr) RediDock	MV11319SHKU3
M1033IPHDKT (3GSK, Spkr) RediDock	MV11319S3HKU3
M1036IPHDKT (6GSK, Spkr) RediDock	MV11319S6HKU3

TWO-LINE VoIP 1.9GHz CORDLESS

M203IP5 (5GSK, Spkr)	MV12319S5DU3
M203IP53 (5/3GSK, Spkr)	MV12319S53DU3
M203IP56 (5/6GSK, Spkr)	MV12319S56DU3
M203IP10 (10GSK, Spkr)	MV12319S10DU3
M203IP103 (10/3GSK, Spkr)	MV12319S103DU3
M203IP106 (10/6GSK, Spkr)	MV12319S106DU3
M203IPHDKT (0GSK, Spkr) RediDock	MV12319SHKU3
M2033IPHDKT (3GSK, Spkr) RediDock	MV12319S3HKU3
M2036IPHDKT (6GSK, Spkr) RediDock	MV12319S6HKU3

SINGLE-LINE VoIP 1.8GHz CORDLESS

M103IP5 (5GSK, Spkr)	MV11318S5DU3
M103IP53 (5/3GSK, Spkr)	MV11318S53DU3
M103IP56 (5/6GSK, Spkr)	MV11318S56DU3
M103IP10 (10GSK, Spkr)	MV11318S10DU3
M103IP103 (10/3GSK, Spkr)	MV11318S103DU3
M103IP106 (10/6GSK, Spkr)	MV11318S106DU3
M103IPHDKT (0GSK, Spkr) RediDock	MV11318SHKU3
M1033IPHDKT (3GSK, Spkr) RediDock	MV11318S3HKU3
M1036IPHDKT (6GSK, Spkr) RediDock	MV11318S6HKU3

(Continued Next Page)...



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.



TWO-LINE VOIP 1.8GHZ CORDLESS

M203IP5 (5GSK, Spkr)	MV12318S5DU3
M203IP53 (5/3GSK, Spkr)	MV12318S53DU3
M203IP56 (5/6GSK, Spkr)	MV12318S56DU3
M203IP10 (10GSK, Spkr)	MV12318S10DU3
M203IP103 (10/3GSK, Spkr)	MV12318S103DU3
M203IP106 (10/6GSK, Spkr)	MV12318S106DU3
M203IPHDKT (0GSK, Spkr) RediDock	MV12318SHKU3
M2033IPHDKT (3GSK, Spkr) RediDock	MV12318S3HKU3
M2036IPHDKT (6GSK, Spkr) RediDock	MV12318S6HKU3

SINGLE-LINE ANALOG 1.9GHZ CORDLESS

M1035 (5GSK, Spkr)	MA1319S5D
M10353 (5/3GSK, Spkr)	MA1319S53D
M10356 (5/6GSK, Spkr)	MA1319S56D
M10310 (10GSK, Spkr)	MA1319S10D
M103103 (10/3GSK, Spkr)	MA1319S103D
M103106 (10/6GSK, Spkr)	MA1319S106D
M103HDKT (0GSK, Spkr) RediDock	MA1319SHK
M1033HDKT (3GSK, Spkr) RediDock	MA1319S3HK
M1036HDKT (6GSK, Spkr) RediDock	MA1319S6HK

TWO-LINE ANALOG 1.9GHZ CORDLESS

M2035 (5GSK, Spkr)	MA2319S5D
M20353 (5/3GSK, Spkr)	MA2319S53D
M20356 (5/6GSK, Spkr)	MA2319S56D
M20310 (10GSK, Spkr)	MA2319S10D
M203103 (10/3GSK, Spkr)	MA2319S103D
M203106 (10/6GSK, Spkr)	MA2319S106D
M203HDKT (0GSK, Spkr) RediDock	MA2319SHK
M2033HDKT (3GSK, Spkr) RediDock	MA2319S3HK
M2036HDKT (6GSK, Spkr) RediDock	MA2319S6HK

SINGLE-LINE ANALOG 1.8GHZ CORDLESS

M1035 (5GSK, Spkr)	MA1318S5D
M10353 (5/3GSK, Spkr)	MA1318S53D
M10356 (5/6GSK, Spkr)	MA1318S56D
M10310 (10GSK, Spkr)	MA1318S10D
M103103 (10/3GSK, Spkr)	MA1318S103D
M103106 (10/6GSK, Spkr)	MA1318S106D
M103HDKT (0GSK, Spkr) RediDock	MA1318SHK
M1033HDKT (3GSK, Spkr) RediDock	MA1318S3HK
M1036HDKT (6GSK, Spkr) RediDock	MA1318S6HK

SINGLE-LINE VoIP CORDED

M100PLBY	MV10N0L3
M100IP5 (5GSK, Spkr)	MV110S5DU3
M100IP10 (10GSK, Spkr)	MV110S10DU3
M100IPTRM Trimline	MV110N0T3

SINGLE-LINE ANALOG CORDED

M100LBY	MA10N0L
M1005 (5GSK, Spkr)	MA10S5D
M10010 (10GSK, Spkr)	MA10S10D
M100TRM Trimline	MA10NT

TWO-LINE ANALOG 1.8GHZ CORDLESSV

M2035 (5GSK, Spkr)	MA2318S5D
M20353 (5/3GSK, Spkr)	MA2318S53D
M20356 (5/6GSK, Spkr)	MA2318S56D
M20310 (10GSK, Spkr)	MA2318S10D
M203103 (10/3GSK, Spkr)	MA2318S103D
M203106 (10/6GSK, Spkr)	MA2318S106D
M203HDKT (0GSK, Spkr) RediDock	MA2318SHK
M2033HDKT (3GSK, Spkr) RediDock	MA2318S3HK
M2036HDKT (6GSK, Spkr) RediDock	MA2318S6HK
M2005 (5GSK, Spkr, Bluetooth)	MA20S5DB
M20010 (10GSK, Spkr, Bluetooth)	MA20S10DB

TWO-LINE VoIP CORDED

M200IP5 (5GSK, Spkr)	MV120S5DU3
M200IP10 (10GSK, Spkr)	MV120S10DU3
M200IPTRM Trimline	MV120N0T3

TWO-LINE ANALOG CORDED

M2005 (5GSK, Spkr)	MA20S5D
M20010 (10GSK, Spkr)	MA20S10D
M200TRM Trimline	MA20NT
M1005 (5GSK, Spkr, BT)	MA10S5DB
M10010 (10GSK, Spkr, BT)	MA10S10DB

TELEDEX I SERIES ANALOG



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL

SMALL FOOTPRINT. ELEGANT LINES.

Designed to embrace the sleek style of the modern hotel guest room, I Series hotel phones provide a familiar user interface for your guests in your choice of single and two-line, analog corded and cordless configurations. Choose 0, 3, 5, or 10 programmable guest service keys, an optional speakerphone, and our patented OneTouch voicemail retrieval technology.

I Series cordless telephones reduce or eliminate the need for multiple telephone jacks in the guestroom, supporting up to 3 additional AC-powered RediDock charging stations, and providing guests with a cordless home-like environment.

I SERIES ANALOG CORDED

- One and two-line telephones
- Optional speakerphone
- RediDock and trimline available
- Patented OneTouch voicemail retrieval
- 0, 3, 5, or 10 programmable guest service keys
- Optional battery backup (cordless version)
- Full-length customizable faceplate
- Desk or wall-mountable
- Electronic 3-way conference (Two-line phones); Hold, Mute & Redial keys
- ADA-compliant volume control with enhanced Sonica™ hearing aid compatibility
- Flash, Hold, Mute, Conference, Redial keys; Bright message waiting indicator
- Visual message waiting indicator

I SERIES ANALOG CORDLESS

- Single or Two line speakerphones
- OneTouch voicemail access
- Electronic 3-way conference (Two-line phones)
- PrimeLine/RingLine™ automatic line selection
- 5 or 10 Configurable Guest Service Keys
- Supports up to five handsets, including one on the base and four remotes (RediDock kits); AutoSync – Handset automatically syncs with base unit when in cradle

I SERIES ANALOG TRIMLINE

- Single or Two line configuration
- Optional message waiting indicator; Flash, Redial, Mute keys
- ADA-compliant volume control with enhanced Sonica™ hearing aid compatibility
- Analog data port
- Dual neon/LED message-waiting light
- Available in ash and black



Ash



Black

Matching RediDock
Cordless available.



I SERIES ANALOG SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full-Length
Footprint (Desk):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.125" (5.40cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.375" (8.57cm) (d) (w/ handset)
Footprint (Wall):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.0" (5.08cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Footprint (RediDock, Cordless) (Desk, Wall):	2.75" (6.99cm) (w) x 8.25" (20.96cm) (l) x 2.25" (5.72cm) (d) (w/o handset); 2.75" (6.99cm) (w) x 8.25" (20.96cm) (l) x 3.38" (8.59cm) (d) (w/ handset)
Footprint (Trimline):	2.75" (w) x 8.25" (l) x 3.38" (d) (6.99cm x 20.96cm x 8.59cm)
Weight:	1.8 lbs. (810g)
Weight (RediDock, Cordless, Trimline):	7 oz. (200g) (w/o handset) 0.8 lbs. (360g) (w/ handset)
Frequency (cordless):	1.8GHz and 1.9GHz
Power:	Line (corded) / 12VDC Adapter (cordless)
Power (cordless):	Remote charging station includes Handset w/ Battery & AC Adapter
Operating Voltage:	24 to 56 VDC Non-Polarity
Standby Time (Cordless):	14 days
Talk Time (Cordless):	6 hours
Range (Cordless):	100ft (30m)
Flash timing:	100ms to 1000ms
Ringer Equivalence:	Z (Use only behind PBX)
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
Registered Connector (Corded):	USOC RJ-14
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Line Cord (Cordless):	RJ45 Line Cord - 12ft (3.66m)
Packaging:	10 per carton
Packaging (RediDock):	10 per carton
Packaging (ITrim):	20 per carton

PACKAGE CONTENTS

- Handset
- Base Unit
- AC Adapter (Cordless only)
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-14 Line Cord
- Faceplate and overlay



Features and specifications are subject to change without notice.
The values for mass and dimension are approximate.

PART NUMBERS

SINGLE-LINE ANALOG 1.9 GHz CORDLESS

AC9105S (5-GSK spkr)	IPN964591(Blk) / IPN96459(Ash)
AC9110S (10-GSK spkr)	IPN965591(Blk) / IPN96559(Ash)
RediDock (Single-line)	IPN965591HDKIT(Blk) / IPN96559HDKIT(Ash)

SINGLE-LINE ANALOG 1.8 GHz CORDLESS

AC8105S (5-GSK spkr)	IPN962591(Blk) / IPN96259(Ash)
AC8110S (10-GSK spkr)	IPN963591(Blk) / IPN96359(Ash)
RediDock (Single-line)	IPN963591HDKIT(Blk) / IPN96359HDKIT(Ash)

TWO-LINE ANALOG 1.9GHz CORDLESS

AC9205S 5-GSK spkr)	IPN984591(Blk) / IPN98459(Ash)
AC9210S 10-GSK spkr)	IPN985591(Blk) / IPN98559(Ash)
RediDock (Single-line)	IPN985591HDKIT(Blk) / IPN98559HDKIT(Ash)

TWO-LINE ANALOG 1.8 GHz CORDLESS

AC8205S (5-GSK spkr)	IPN982591(Blk) / IPN98259(Ash)
AC8210S (10-GSK spkr)	IPN983591(Blk) / IPN98359(Ash)
RediDock (Single-line)	IPN983591HDKIT(Blk) / IPN98359HDKIT(Ash)

SINGLE-LINE ANALOG CORDED

A101 (Lobby)	IPN330091(Blk) / IPN33009(Ash)
A100 (Basic)	IPN333091(Blk) / IPN33309(Ash)
A102 (Basic)	IPN330391(Blk) / IPN33039(Ash)
A103 (3-GSK)	IPN337391(Blk) / IPN33739(Ash)
A105 (5-GSK)	IPN331391(Blk) / IPN33139(Ash)
A110 (10-GSK)	IPN332391(Blk) / IPN33239(Ash)
A100s (Basic spkr)	IPN330491(Blk) / IPN33049(Ash)
A103s (3-GSK spkr)	IPN337491(Blk) / IPN33749(Ash)
A105S (5-GSK spkr)	IPN331491(Blk) / IPN33149(Ash)
A110S (10-GSK spkr)	IPN333391(Blk) / IPN33339(Ash)

TWO-LINE ANALOG CORDED

A200s (Basic spkr)	IPN340491(Blk) / IPN34049(Ash)
A203s (3-GSK spkr)	IPN347491(Blk) / IPN34749(Ash)
A205S (5-GSK spkr)	IPN341491(Blk) / IPN34149(Ash)
A210S (10-GSK spkr)	IPN343591(Blk) / IPN34359(Ash)

I SERIES TRIMLINE (SINGLE-LINE)

AT1101 NO/MW	IPN330191(Blk) / IPN33019(Ash)
AT1102 W/MW	IPN331191(Blk) / IPN33119(Ash)

I SERIES TRIMLINE 2 (TWO-LINE)

AT1201 NO/MW	IPN340591(Blk) / IPN34059(Ash)
AT1202 W/MW	IPN341591(Blk) / IPN34159(Ash)

TELEDEX I SERIES VoIP



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL



SMALL FOOTPRINT. ELEGANT LINES.

Designed to embrace the sleek style of the modern hotel guest room, I Series hotel phones provide a familiar user interface for your guests in your choice of single and two-line, VoIP corded and cordless configurations. Choose 0, 3, 5, or 10 programmable guest service keys, an optional speakerphone, and our patented OneTouch voicemail retrieval technology.

I Series cordless telephones reduce or eliminate the need for multiple telephone jacks in the guestroom, supporting up to 3 additional AC-powered RediDock charging stations, and providing guests with a cordless home-like environment.

I SERIES VoIP HIGHLIGHTS

- One and two-line VoIP telephones
- Optional speakerphone
- RediDock available
- Patented OneTouch voicemail retrieval
- 0, 5, or 10 programmable guest service keys
- Full-length customizable faceplate
- Desk or wall-mountable
- VoIP-based protocol; SIP RFC 3261 compliant
- Codecs supported: G711a; G711µ; G729
- Supports 802.1Q VLAN tagging
- 2-port 10/100 Ethernet switch
- Supports DHCP or static IP address
- Electronic 3-way conference (Two-line phones); Hold, Mute, Redial keys
- Cordless: Supports up to five handsets, including one on the base and four remotes (RediDock kits); AutoSync – handset automatically syncs with base unit when in cradle
- ADA-compliant volume control with enhanced Sonica™ hearing aid compatibility
- Visual message waiting indicator (Corded)
- Positive charge indicator (Cordless)
- Optional remote cordless handset battery backup (Cordless)



Ash



Black



Matching RediDock
Cordless available.

I SERIES VoIP SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full-Length
Footprint (Desk):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.125" (5.40cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.375" (8.57cm) (d) (w/ handset)
Footprint (Wall):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.0" (5.08cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Footprint (RediDock, Cordless) (Desk, Wall):	2.75" (6.99cm) (w) x 8.25" (20.96cm) (l) x 2.25" (5.72cm) (d) (w/o handset); 2.75" (6.99cm) (w) x 8.25" (20.96cm) (l) x 3.38" (8.59cm) (d) (w/ handset)
Weight:	1.8 lbs. (810g)
Weight (RediDock, Cordless):	7 oz. (200g) (w/o handset) 0.8 lbs. (360g) (w/ handset)
Frequency (cordless):	1.8GHz and 1.9GHz
Power:	Power over Ethernet (POE) 802.3af Compliant
Power (cordless):	Remote charging station includes Handset w/ Battery & AC Adapter
Operating Voltage:	24 to 56 VDC Non-Polarity
Standby Time (Cordless):	14 days
Talk Time (Cordless):	4 hours
Range (Cordless):	100ft (30m)
Flash timing:	600ms
Ringer Equivalence:	Z (Use only behind PBX)
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
RFCs:	3261 (SIP), 3842 (SIP Subscribe), 2833 (SIP Info)
Registered Connector (Corded):	USOC RJ-14
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ45 Line Cord - 12ft (3.66m)
Packaging:	10 per carton
Packaging (RediDock):	10 per carton

PACKAGE CONTENTS

- Handset
- Base Unit
- AC Adapter (RediDock)
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-45 Line Cord
- Faceplate and overlay



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

PART NUMBERS

SINGLE-LINE VOIP 1.9 GHz CORDLESS

NDC2105S (5GSK Spkr)	IV11319S5D3(Blk)/IV21319S5D3
NDC2110S (10GSK Spkr)	IV11319S10D3(Blk)/IV21319S10D3
IRD9110 RediDock	IV11319N0HK3(Blk)/IV21319N0HK3

TWO-LINE VoIP 1.9GHz CORDLESS

NDC2205S (5GSK Spkr)	IV12319S5D3(Blk)/IV22319S5D3
NDC2210S (10GSK Spkr)	IV12319S10D3(Blk)/IV22319S10D3
IRD9210 RediDock	IV12319N0HK3(Blk)/IV22319N0HK3

SINGLE-LINE VoIP 1.8GHz CORDLESS

NDC2105S (5GSK Spkr)	IV11318S5D3(Blk)/IV21318S5D3
NDC2110S (10GSK Spkr)	IV11318S10D3(Blk)/IV21318S10D3
IRD8110 RediDock	IV11318N0HK3

TWO-LINE VoIP 1.8GHz CORDLESS

NDC2205S (5GSK Spkr)	IV12318S5D3(Blk)/IV22318S5D3
NDC2210S (10GSK Spkr)	IV12318S10D3(Blk)/IV22318S10D3
IRD8210 RediDock	IV12318N0HK3(Blk)/IV22318N0HK3

SINGLE-LINE VoIP CORDED

ND2105S (5GSK Spkr)	IV110S5D3(Blk)/IV210S5D3
ND2110S (10GSK Spkr)	IV110S10D3(Blk)/IV210S10D3

TWO-LINE VoIP CORDED

ND2205S (5GSK Spkr)	IV120S5D3(Blk)/IV220S5D3
ND2210S (10GSK Spkr)	IV120S10D3(Blk)/IV220S10D3

TELEDEX DIAMOND SERIES



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL

THE WORLD'S MOST POPULAR HOTEL PHONE.

This is the phone that started it all. In fact, more hotels use Teledex Diamond Series hotel phones than any other guestroom telephones.

With over 5 million in service worldwide, this corded analog phone is available in single or two-line models, with up to 10 programmable guest service keys, patented OneTouch voicemail retrieval technology, and an optional speakerphone.

Diamond Series hotel telephones, like all Teledex products, are thoughtfully designed to last for years in the demanding hospitality environment. Expect to see this model in hotel rooms for years to come.

DIAMOND SERIES HIGHLIGHTS

- One and two-line analog telephones
- Optional speakerphone
- Patented OneTouch voicemail retrieval
- Message-waiting light
- 0, 3, 5 or 10 guest service keys
- Full-length customizable faceplate
- Desk or wall mountable
- Available in Ash and Black
- Integrated Speakerphone – Hands-free conversations
- ADA Handset Volume Boost – Three (3) distinct levels, compliant with HAC/VC and FCC requirements
- Mute Key – Deactivates microphone during speakerphone and handset calls
- Speaker On/Off Key – With red LED for easy speakerphone activation
- Electronic 3-way Call Conference Function with LED indicator for convenient multi-line conversations (Two-line only)
- Hold Key – Places the active line on hold so the second line can be used or a conference call initiated (Two-line only)
- Hold Release Detection Circuit – Releases calls on hold when line is accessed by any telephone
- Redial Key – Automatically redials the last number dialed, with timed deletion of the last number after 30 minutes for enhanced hospitality security (most models)
- Flash Key (most models)
- Textured Finish – Provides durable resistance against scratches and smudges
- Hidden Programming Key – Eliminates arbitrary reprogramming of autodial keys
- Data Port – Easy access for laptop modem or fax machine use



Ash



Black



DIAMOND SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full-Length
Footprint (Desk):	6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 2.5" (6.35cm) (d) (w/o handset); 6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 3.75" (9.53cm) (d) (w/ handset)
Footprint (Wall):	6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 2.5" (6.35cm) (d) (w/o handset); 6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 3.75" (9.53cm) (d) (w/ handset)
Weight:	1.8 lbs. (830g)
Power:	Line
Operating Voltage:	24 to 56VDC Non-Polarity
Flash timing:	100ms to 1000ms
Signaling:	Standard 12 tone DTMF no Pulse/Rotary dialing
Ringer Equivalence:	Z (Use only behind PBX)
Registered Connector:	USOC RJ-14
Cabling:	2 pair minimum
Handset:	Hearing Aid compatible / Standard "K" type
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Packaging:	10 per carton

PACKAGE CONTENTS

- Handset
- Base Unit
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-14 Line Cord
- Faceplate and overlay



Features and specifications are subject to change without notice.
The values for mass and dimension are approximate.

PART NUMBERS

SINGLE-LINE PHONE

Diamond Lobby	DIA65009 (Ash) / DIA650091 (Blk)
Diamond Basic	DIA65309 (Ash) / DIA653091 (Blk)
Diamond +3	DIA65739 (Ash) / DIA657391 (Blk)
Diamond +5	DIA65139 (Ash) / DIA651391 (Blk)
Diamond +10	DIA65239 (Ash) / DIA652391 (Blk)
Diamond +S-3	DIA65749 (Ash) / DIA657491 (Blk)
Diamond +S-5	DIA65149 (Ash) / DIA651491 (Blk)
Diamond +S-10	DIA65339 (Ash) / DIA653391 (Blk)
Diamond +S	DIA65049 (Ash) / DIA650491 (Blk)

TWO-LINE PHONE

Diamond L2-E	DIA67059 (Ash) / DIA670591 (Blk)
Diamond L2-5E	DIA67159 (Ash) / DIA671591 (Blk)
Diamond L2-10E	DIA67259 (Ash) / DIA672591 (Blk)
Diamond L2S-5E	DIA67149 (Ash) / DIA671491 (Blk)
Diamond L2S-10E	DIA67359 (Ash) / DIA673591 (Blk)

TELEDEX D SERIES



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL



USB CHARGING PORTS
FOR SMART DEVICES

THE NEW DIAMOND.

We began the development of Teledex D Series with a fresh new contemporary design, robust ergonomic open handset, and guest smart device USB charging ports, but maintained the same Diamond faceplate area so Diamond Series owners may easily upgrade with **existing faceplates**.

D Series sets the new standard in analog corded hotel phone telephony in single or two-line models with optional built-in USB charging ports, up to 10 programmable guest service keys, patented OneTouch voicemail retrieval technology, and optional speakerphone.

D Series, like all Teledex products, is thoughtfully designed to meet emerging guest preferences, and to last for many years in demanding hospitality environments.

D SERIES HIGHLIGHTS

- One and two-line analog telephones
- Optional speakerphone
- Optional USB Charging Ports (2)
- Patented OneTouch voicemail retrieval
- Message-waiting light
- 0, 3, 5 or 10 guest service keys
- Full-length customizable faceplate
- Desk or wall mountable
- ADA Handset Volume Boost – Three (3) distinct levels, compliant with HAC/VC and FCC requirements
- Mute Key – Deactivates microphone during speakerphone and handset calls
- Speaker On/Off Key – With red LED for easy speakerphone activation
- Electronic 3-way Call Conference Function with LED indicator for convenient multi-line conversations (Two-line only)
- Hold Key – Places the active line on hold so the second line can be used or a conference call initiated (Two-line only)
- Hold Release Detection Circuit – Releases calls on hold when line is accessed by any telephone
- Redial Key – Automatically redials the last number dialed, with timed deletion of the last number after 30 minutes for enhanced hospitality security (most models)
- Flash Key (most models)
- Textured Finish – Provides durable resistance against scratches and smudges
- Hidden Programming Key – Eliminates arbitrary reprogramming of autodial keys



Ash



Black



D SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full-Length
Footprint (Desk):	6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 2.5" (6.35cm) (d) (w/o handset); 6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 3.75" (9.53cm) (d) (w/ handset)
Footprint (Wall):	6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 2.5" (6.35cm) (d) (w/o handset); 6.25" (15.88cm) (w) x 9.5" (24.13cm) (l) x 3.75" (9.53cm) (d) (w/ handset)
Weight:	1.9 lbs. (860g)
Power:	Line
Operating Voltage:	24 to 56 VDC Non-Polarity
Flash timing:	100ms to 1000ms
Signaling:	Standard 12 tone DTMF no Pulse/Rotary dialing
Ringer Equivalence:	Z (Use only behind PBX)
Registered Connector:	USOC RJ-14
Cabling:	2 pair minimum
Handset:	HearingAid compatible / Standard "K" type
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Handset Cord:	10' coil cord
Packaging:	10 per carton

PART NUMBERS

SINGLE-LINE PHONE

D100 Lobby – 1L, 0GSK	DA210N0L(Ash) / DA110N0L(Blk)
D100 Basic – 1L, 0GSK	DA210N0D(Ash) / DA110N0D(Blk)
D1003 – 1L, 3 GSK	DA210N3D(Ash) / DA110N3D(Blk)
D1005 – 1L, 5 GSK	DA210N5D(Ash) / DA110N5D(Blk)
D10010 – 1L, 10 GSK	DA210N10D(Ash) / DA110N10D(Blk)
D100S3 – 1L, 3 GSK, Spkr	DA210S3D(Ash) / DA110S3D(Blk)
D100S5 – 1L, 5 GSK, Spkr	DA210S5D(Ash) / DA110S5D(Blk)
D100S3U – 1L, 3 GSK, Spkr, USB	DA210S3DU(Ash) / DA110S3DU(Blk)
D100S5U – 1L, 5 GSK, Spkr, USB	DA210S5DU(Ash) / DA110S5DU(Blk)
D100S10U – 1L, 10 GSK, Spkr, USB	DA210S10DU(Ash) / DA110S10DU(Blk)
D100S10 – 1L, 10 GSK, Spkr	DA210S10D(Ash) / DA110S10D(Blk)

TWO-LINE PHONE

D200L2E – 2L, 0GSK	DA220N0D(Ash) / DA120N0D(Blk)
D200L25E – 2L, 5 GSK	DA220N5D(Ash) / DA120N5D(Blk)
D200L210E – 2L, 10 GSK	DA220N10D(Ash) / DA120N10D(Blk)
D200L2S5E – 2L, 5 GSK, Spkr	DA220S5D(Ash) / DA120S5D(Blk)
D200L2S10E – 2L, 10 GSK, Spkr	DA220S10D(Ash) / DA120S10D(Blk)
D200S5U – 2L, 5 GSK, Spkr, USB	DA220S5DU(Ash) / DA120S5DU(Blk)
D200S10U – 2L, 10 GSK, Spkr, USB	DA220S10DU(Ash) / DA120S10DU(Blk)

PACKAGE CONTENTS

- Handset
- Base Unit
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-14 Line Cord
- Faceplate and overlay



Features and specifications are subject to change without notice.
The values for mass and dimension are approximate.

TELEDEX OPAL SERIES



PROGRAMMABLE
GUEST SERVICE KEYS

DESIGNED WITH THE WORLD IN MIND.

Teledex Opal Series hotel phones have a modern, recognizable international design that compliments modern guest room decor. Available in single and two-line, analog, corded and cordless configurations, with an optional speakerphone, Opal Series are equipped with a red multi-function message-waiting light, and 0, 3, 5, or 10 programmable guest service keys.

Teledex Opal DCT Series cordless sets support up to 5 additional AC-powered RediDock handset charging stations giving your guests the ability to charge their handset from multiple places within the room, all without needing additional guest room telephone jacks. Opal Series DCT cordless phone models are also available with optional battery backup during power outages.

OPAL DCT 1900/2900/1800/2800 SERIES HIGHLIGHTS

- 1.8GHz and 1.9GHz DECT for best range, clarity, & security
- Single or Two line configuration
- EZ-Answer connects to incoming call by pressing any key
- Superior Quality Speakerphone for Hands-free calls
- Two lines with conference (Two-line only)
- Supports up to five handsets, including one on the base and four remotes
- AutoSync – handset automatically syncs with base unit when in cradle
- Optional remote cordless handset battery backup
- Easy-access data port
- Up to ten Configurable Guest Service Keys
- LifeLinePlus allows use during power failure
- Last number redial
- Lighted handset keypad
- Handset page/locator
- Low battery & Line status indicators
- Breakage-resistant, non-extending antenna
- Large printable faceplate area
- Bright message wait lamp and positive charge indicator

OPAL 1000/2000 SERIES ANALOG

- Single or Two line configuration w/ Optional speakerphone
- Auto Detect MWI for high and low voltage signaling
- Large printable faceplate area for important dialing and contact information
- Easy-access data port for convenient laptop computer connection
- Sleek Euro design complements any room decor
- Extra-bright message waiting indicator
- Electronic 3-way conference (Two-line only)
- Last-number redial
- Up to 11 Configurable Guest Service Keys
- Handset volume boost

OPAL TRIMLINE ANALOG SERIES

- Single or Two line configuration
- Optional message waiting indicator
- ADA-compliant volume control
- Flash, Redial, Mute keys



Ash



Black



OPAL DCT 1900/2900/1800/2800 SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full-Length
Footprint (Desk):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.13" (5.41cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.38" (8.59cm) (d) (w/ handset)
Footprint (Wall):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.0" (5.08cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Footprint (RediDock):	3.75" (w) x 8.17" (l) x 3.38" (d) (9.53cm x 20.75cm x 8.59cm)
Weight:	1.8 lbs. (810g)
Weight (RediDock):	7 oz. (0.2kg) (w/o handset) - 0.95 lbs. (0.43kg) (w/ handset)
Frequency (cordless):	1.8GHz and 1.9GHz
Power:	9VDC adapter
Operating Voltage:	24 to 56VDC Non-Polarity
Standby Time:	14 days
Talk Time (Cordless):	4 hours
Range (Cordless):	100ft (30m)
Flash timing:	600ms
Ringer Equivalence:	Z (Use only behind PBX)
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
Line Cord:	RJ45 line cord - 12 ft (3.66m)
Packaging:	10 per carton
Packaging (RediDock):	10 per carton

OPAL 1000/2000 SERIES ANALOG SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full-Length
Footprint (Desk):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.125" (5.40cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.375" (8.57cm) (d) (w/ handset)
Footprint (Wall):	6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 2.0" (5.08cm) (d) (w/o handset); 6.0" (15.24cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Weight:	2.0 lbs. (900g)
Power:	Line
Operating Voltage:	24 to 56VDC Non-Polarity
Flash timing:	100ms to 1000ms
Ringer Equivalence:	Z (Use only behind PBX)
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
Registered Connector:	USOC RJ-14
Handset:	Hearing Aid Compatible
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Cords & Line:	12-foot/10-foot coil
Packaging:	10 per carton

PART NUMBERS

DECT 1.9 GHZ (SINGLE LINE)

Opal DCT1905	OPL951491(Blk) / OPL95149 (Ash)
Opal DCT1910	OPL953391(Blk) / OPL95339 (Ash)
RediDock RD1910 (Single-line)	OPL953391HDKIT(Blk) / OPL95339HDKIT(Ash)

DECT 1.9 GHZ (TWO LINE)

Opal DCT2905	OPL971491(Blk) / OPL97149(Ash)
Opal DCT2910	OPL973591(Blk) / OPL97359(Ash)
RediDock RD2910 (Two-line)	OPL973591HDKIT(Blk) / OPL97359HDKIT(Ash)

DECT 1.8 GHZ (SINGLE LINE)

Opal DCT1805	OPL951481(Blk) / OPL95148(Ash)
Opal DCT1810	OPL953381(Blk) / OPL95338(Ash)
RediDock RD1910 (Single-line)	OPL953381HDKIT(Blk) / OPL95338HDKIT(Ash)

DECT 1.8 GHZ (TWO LINE)

Opal DCT2805	OPL971481(Blk) / OPL97148(Ash)
Opal DCT2810	OPL973581(Blk) / OPL97358(Ash)
RediDock RD2810 (Single-line)	OPL973581HDKIT(Blk) / OPL97358HDKIT(Ash)

SINGLE-LINE MODELS

Opal 1001 (Basic)	OPL760091 (Blk) / OPL76009 (Ash)
Opal 1000 (Basic)	OPL763091 (Blk) / OPL76309 (Ash)
Opal 1002 (Basic)	OPL760391 (Blk) / OPL76039 (Ash)
Opal 1003 (3-GSK)	OPL767391 (Blk) / OPL76739 (Ash)
Opal 1005 (5-GSK)	OPL761391 (Blk) / OPL76139 (Ash)
Opal 1010 (10-GSK)	OPL762391 (Blk) / OPL76239 (Ash)
Opal 1003s (3-GSK spkr)	OPL767491 (Blk) / OPL76749 (Ash)
Opal 1005S (5-GSK spkr)	OPL761491 (Blk) / OPL76149 (Ash)
Opal 1010S (10-GSK spkr)	OPL763391 (Blk) / OPL76339 (Ash)

TWO-LINE MODELS

Opal 2006 (6-GSK)	OPL780391 (Blk) / OPL78039 (Ash)
Opal 2011 (11-GSK)	OPL782591 (Blk) / OPL78259 (Ash)
Opal 2006s (6-GSK spkr)	OPL781491 (Blk) / OPL78149 (Ash)
Opal 2011s (11-GSK spkr)	OPL783591 (Blk) / OPL78359 (Ash)

PACKAGE CONTENTS

- Handset
- Base Unit
- AC Adapter (Cordless)
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-14 Line Cord
- Faceplate and overlay



OPAL SERIES TRIMLINE SPECIFICATIONS

Standard Colors:	Ash and Black
Footprint (Desk,Wall):	.3.75" (9.53cm) (w) x 8.17" (20.75cm) (l) x 2.0" (5.08cm) (l) (w/o handset); 3.75" (9.53cm) (w) x 8.17" (20.75cm) (l) x 3.38" (8.59cm) (l) (w/ handset)
Weight:	0.95 lbs. (430g)
Power:	Line
Operating Voltage:	24 to 56 VDC Non-Polarity
Ringer Equivalence:	Z (Use only behind PBX)
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	Meets or exceeds Part 15, Subpart J, Class A, Part 68
Safety Standard:	ETL and CE
Registered Connector:	USOC RJ-14
Handset:	Hearing Aid Compatible
Cords & Line:	12-foot/10-foot coil
Packaging:	20 per carton

PART NUMBERS

OPAL TRIMLINE (SINGLE-LINE)

NO MWL	OPL690191 (Blk) / OPL69019 (Ash)
With MWL	OPL691191(Blk) / OPL69119(Ash)

OPAL TRIMLINE 2 (TWO-LINE)

NO MWL	OPL690591(Blk) / OPL69059(Ash)
With MWL	OPL691591(Blk) / OPL69159(Ash)

PACKAGE CONTENTS

- Handset
- Base Unit
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-14 Line Cord



Features and specifications are subject to change without notice.
The values for mass and dimension are approximate.



TELEDEX NUGGET SERIES



DESIGNED FOR TIGHT SPACES & TIGHTER BUDGETS

No frills. No extras. Just a quality hotel phone that fits any budget and will leave extra room on your nightstand. Teledex Nugget Series hotel phones combine classic design, easy-to-use functionality, and rugged durability into a small footprint that makes a large impact.

Equipped with either 0 or 3 programmable guest service keys, a raised red LED message-waiting light, and a dial pad that is tucked away leaving extra room for a customizable faceplate. Nugget Series offers single-line functionality at an affordable price.



PROGRAMMABLE
GUEST SERVICE KEYS



Ash



Black

NUGGET SERIES HIGHLIGHTS

- Single Line Telephones
- ADA Handset Volume Boost – HAC/VC and FCC compliant
- Data Port – Easy access for laptop modem or fax machine use
- Raised Red Message Waiting Lens – Easily seen from any area in the guestroom
- Paper Faceplate – Allows user-friendly customization
- MultiX™ Message Waiting Circuitry – with an extra-bright message-waiting lamp (Nugget 3)
- Redial Key – Redials the last number dialed (Nugget 3)
- Flash Function – Access to PBX functions
- Hidden Programming Key – Eliminates arbitrary reprogramming of autodial keys (Nugget 3)
- Textured Finish – Durable resistance against scratches and smudges
- Stylish Euro Handset – Complements room decor
- Desk or Wall Mountable – Provides placement flexibility

NUGGET SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Footprint (Nugget 3):	6.25" (15.88cm) (w) x 9.0" (22.86cm) (l) x 2" (5.08cm) (d) (w/o handset); 6.25" (15.88cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Footprint (Nugget):	4.75" (12.07cm) (w) x 9.0" (22.86cm) (l) x 2" (5.08cm) (d) (w/o handset); 4.75" (12.07cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Weight:	1.4 lbs. (630g)
Faceplate Size:	8.75" (222mm) x 3.13" (79.5mm)
Power:	Line
Operating Voltage:	.24 to 56VDC
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	FCC Part 15 Support B; 2009
Safety Standard:	ETL and CE
Handset:	Hearing Aid compatible - Standard or Euro type
Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 line cord - 12 ft (3.66m)
Packaging:	10 per carton

PART NUMBERS

SINGLE-LINE PHONE

NUGGET 3 SERIES NUG31739(Ash) / NUG317391(Blk)

NUGGET SERIES NUG31039(Ash) / NUG310391(Blk)

PACKAGE CONTENTS

- Handset
- Base Unit
- 10' foot Handset Coil Cord
- 12' 4-wire RJ-11 Line Cord
- Faceplate and overlay



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

TELEMATRIX 9700 SERIES



AMAZINGLY EXQUISITE! FUNCTIONS BEYOND BEAUTIFUL!

When you combine Telematrix's legendary performance with the style of our new 3500|9700 series hotel telephones, you get an elegant functionality that will fit into any of your hotel décors. The 3500|9700 series telephones are a perfect fit! To further match your hotel's décor, choose from any of 5 standard or custom color inserts. Functionality includes our patented OneTouch voice mail technology for hands-free auto-dialing and retrieval, and an integrated Ethernet pass-through port for guest connectivity, (IP models only).

The 9700 series also boasts AutoSync pairing, which automatically registers the remote 9700 Series cordless handsets with the base unit when in the cradle to avoid failures from misplaced handsets. Our optional battery backup feature also helps assure guest connectivity during power outages.

ANALOG & VOIP CORDED HIGHLIGHTS

- Available in 1 or 2-line configurations
- USB charging port optional
- Speakerphone or non-speakerphone
- 0, 3, 5 or 10 programmable Guest Service Keys
- Patented OneTouch voice mail retrieval technology
- Dual Neon / LED message-waiting light / SIP Standard voicemail messaging (VoIP phones)
- LED indicator lights for Speaker, Mute, & Hold keys, Line 1, Line 2 keys (2-line models only)
- 3-way conference calling (2-line models only)
- Industrial grade construction with matte finish
- Non-slip base
- Available in Cool Gray or Black

ANALOG & VOIP CORDLESS HIGHLIGHTS

- Available in 1 or 2-line configurations with speakerphone
- USB charging port optional
- Supports up to 4 handsets (base model and three remotes)
- 5 or 10 programmable guest service keys
- Patented OneTouch voice mail retrieval technology
- Dual Neon/LED message-waiting light
- LED indicator lights for Speaker, Mute, & Hold keys, Line 1 & Line 2 keys (2-line models only)
- HAC/VCH (ADA) compliant handset volume boost
- Choose 1.8 GHz or 1.9 GHz frequency
- 3-way conference calling (2-line models only)
- Dual Port (10/100) for HSIA (VoIP)
- Industrial grade construction with matte finish
- Non-slip base
- Available in Cool Gray or Black

TELEMATRIX 9700



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL



VoIP AND ANALOG
MODELS AVAILABLE



Matching Handset Kit
Cordless available.



9700 SERIES SPECIFICATIONS

Standard Colors:	Black or Cool Gray
Faceplate Size:	Full length
Packaging:	10 per carton - Phones or Handset Kits
Footprint:	8"(20.32cm) (l) x 3.63"(9.22cm) (h) x 4.5"(11.43cm) (w)
Weight:	VoIP 2.0 lbs. (0.9kg)
Line Voltage:	24 to 56 VDC Non-Polarity
Line Current:	20mA-100mA Auto detect for 90 VDC Neon or Low Voltage LED
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance:	ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence:	1.3dB
Max Power Output:	18.11 dBm
Antenna Gain:	0 dBi
Frequency Range (9600):	1.8 GHz and 1.9 GHz
Frequency Range (9400):	2.4 GHz (2400-2480.544 MHz)
Handset:	ADA/FCC Hearing Aid Compliant
Line Cord:	RJ45 Line Cords—12 ft/3.66 m
Line Cord (Analog):	RJ14 Line Cord—12 ft/3.66 m

INSERT COLORS

For an additional charge, choose from four insert color options to match your brand, office, or guest room décor. For insert color part numbers, add the following suffixes at the end of the cool gray or black part number.

Black (standard) / Red = RED / Blue = BLU / Bronze = BRZ / Silver = SLV
 Example: 3500MWD Black with Red insert = 35A110S10DRED



Teledex 9700 Series VoIP models feature a 1-year limited warranty.



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

PART NUMBERS

VOIP SINGLE-LINE SPEAKERPHONE (WITH USB)

9700IPMWD5 (5 GSK)	97V51319S5DU3(CIGr) / 97V11319S5DU3 (Blk)
9700IPMWD (10 GSK)	97V51319S10DU3(CIGr) / 97V11319S10DU3 (Blk)

VOIP SINGLE-LINE SPEAKERPHONE

9700IPMWD5 (5 GSK)	97V51319S5D3(CIGr) / 97V11319S5D3 (Blk)
9700IPMWD (10 GSK)	97V51319S10D3(CIGr) / 97V11319S10D3 (Blk)

VOIP TWO-LINE SPEAKERPHONE (WITH USB)

9702IPMWD5 (5 GSK)	97V52319S5DU3(CIGr) / 97V12319S5DU3 (Blk)
9702IPMWD (10 GSK)	97V52319S10DU3(CIGr) / 97V12319S10DU3 (Blk)

VOIP TWO-LINE SPEAKERPHONE

9702IPMWD5 (5 GSK)	97V52319S5D3(CIGr) / 97V12319S5D3 (Blk)
9702IPMWD (10 GSK)	97V52319S10D3(CIGr) / 97V12319S10D3 (Blk)

VOIP REMOTE HANDSETS

Handset Kit IP - 1 Line	97V51319S0HK3(CIGr) / 97V11319S0HK3 (Blk)
Handset Kit IP - 1 Line - USB	97V51319S0HKU3(CIGr) / 97V11319S0HKU3 (Blk)
Handset Kit IP - 2 Line	97V52319S0HK3(CIGr) / 97V12319S0HK3 (Blk)
Handset Kit IP - 2 Line - USB	97V52319S0HKU3(CIGr) / 97V12319S0HKU3 (Blk)

ANALOG SINGLE-LINE SPEAKERPHONE (WITH USB)

9700MWD5 (5 GSK)	97A51319S5DU(CIGr) / 97A11319S5DU (Blk)
9700MWD (10 GSK)	97A51319S10DU(CIGr) / 97A11319S10DU (Blk)

ANALOG SINGLE-LINE SPEAKERPHONE

9700MWD5 (5 GSK)	97A51319S5D(CIGr) / 97A11319S5D (Blk)
9700MWD (10 GSK)	97A51319S10D(CIGr) / 97A11319S10D (Blk)

ANALOG TWO-LINE SPEAKERPHONE (WITH USB)

9702MWD5 (5 GSK)	97A52319S5DU(CIGr) / 97A12319S5DU (Blk)
9702MWD (10 GSK)	97A52319S10DU(CIGr) / 97A12319S10DU (Blk)

ANALOG TWO-LINE SPEAKERPHONE

9702MWD5 (5 GSK)	97A52319S5D(CIGr) / 97A12319S5D (Blk)
9702MWD (10 GSK)	97A52319S10D(CIGr) / 97A12319S10D (Blk)

ANALOG REMOTE HANDSETS

Handset Kit - 1 Line	97A51319S0HK(CIGr) / 97A11319S0HK (Blk)
Handset Kit - 1 Line - USB	97A51319S0HKU(CIGr) / 97A11319S0HKU (Blk)
Handset Kit - 2 Line	97A52319S0HK(CIGr) / 97A12319S0HK (Blk)
Handset Kit - 2 Line - USB	97A52319S0HKU(CIGr) / 97A12319S0HKU (Blk)

PACKAGE CONTENTS

- 9700 Series base
- Handset
- RJ45 line cord
- RJ14 line cord, 12 ft/3.66 m (Analog)
- AC Adapter (Analog)
- Faceplates for handset & base
- Overlays for handset & base

 Cool Grey (CIGr)

 Black (Blk)

TELEMATRIX 3500 SERIES



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL



VoIP AND ANALOG
MODELS AVAILABLE



Trimline Model

When you combine Telematrix's legendary performance with the style of our new 3500|9700 series hotel telephones, you get an elegant functionality that will fit into any of your hotel décors. The 3500|9700 series telephones are a perfect fit! To further match your hotel's décor, choose from any of 4 standard or custom color inserts. Functionality includes our patented OneTouch voice mail technology for hands-free auto-dialing and retrieval, and an integrated Ethernet pass-through port for guest connectivity, (IP models only).

The 9700 series also boasts AutoSync pairing, which automatically registers the remote 9700 Series cordless handsets with the base unit when in the cradle to avoid failures from misplaced handsets. Our optional battery backup feature also helps assure guest connectivity during power outages.

ANALOG & VOIP CORDED HIGHLIGHTS

- Available in 1 or 2-line configurations
- USB charging port optional
- Speakerphone or non-speakerphone
- 0, 3, 5 or 10 programmable Guest Service Keys
- Patented OneTouch voice mail retrieval technology
- Dual Neon / LED message-waiting light / SIP Standard voicemail messaging (VoIP phones)
- LED indicator lights for Speaker, Mute, & Hold keys, Line 1, Line 2 keys (2-line models only)
- 3-way conference calling (2-line models only)
- Industrial grade construction with matte finish
- Non-slip base
- Available in Cool Gray or Black

ANALOG & VOIP CORDLESS HIGHLIGHTS

- Available in 1 or 2-line configurations with speakerphone
- USB charging port optional
- Supports up to 4 handsets (base model and three remotes)
- 5 or 10 programmable guest service keys
- Patented OneTouch voice mail retrieval technology
- Dual Neon/LED message-waiting light
- LED indicator lights for Speaker, Mute, & Hold keys, Line 1 & Line 2 keys (2-line models only)
- HAC/VCH (ADA) compliant handset volume boost
- Choose 1.8 GHz or 1.9 GHz frequency
- 3-way conference calling (2-line models only)
- EasyAccess™ data port (Analog)
- Dual Port (10/100) for HSIA (VoIP)
- Industrial grade construction with matte finish
- Non-slip base
- Available in Cool Gray or Black



3500 SERIES SPECIFICATIONS

Standard Colors:	Ash or Black
Faceplate Size:	Full length
Footprint:	8.5" (215.9mm) (l) x 3.5" (88.9mm) (h) x 6.75" (171.45mm) (w)
Footprint (Trimline):	9.75" (247.65mm) (l) x 2.5" (63.5mm) (h) x 3.25" (82.55mm) (w)
Weight:	3.6lbs. (1632g)
Line Voltage:	24-52VDC (+/-)
Line Current:	20mA-100mA Auto detect for 90VDC Neon or Low Voltage LED
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance:	ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence:	1.3dB
Max Power Output:	18.11 dBm
Handset:	ADA/FCC Hearing Aid Compliant
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Line Cord (VoIP):	RJ45 Line Cord—12 ft/3.66 m
Packaging:	10 per carton
Packaging (Trimline):	20 per carton

INSERT COLORS

For an additional charge, choose from four insert color options to match your brand, office, or guest room décor. For insert color part numbers, add the following suffixes at the end of the cool grey or black part number.

Red = RED / Blue = BLU / Bronze = BRZ / Silver = SLV
 Example: 3500MWD Black with Red insert = 35A110S10DRED



Teledex 3500 Series Analog models feature a 5-year limited warranty.



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

PACKAGE CONTENTS

- 3500 Series base & Handset
- RJ45 line cord (VoIP)
- RJ14 line cord, 12 ft/3.66 m (Analog)
- Faceplate and overlay



PART NUMBERS

VOIP SINGLE-LINE NON-SPEAKERPHONE

3500IP LBY (0 GSK, Lobby)	35V50N0L3 (ClGr) / 35V10N0L3 (Blk)
3500IP MWB (0 GSK)	35V510N0D3 (ClGr) / 35V110N0D3 (Blk)

VOIP SINGLE-LINE SPEAKERPHONE (WITH USB)

3500IP MWD5 (5 GSK)	35V510S5DU3 (ClGr) / 35V110S5DU3 (Blk)
3500IP MWD (10 GSK)	33V510S10D3 (ClGr) / 35V110S10DU3 (Blk)

VOIP SINGLE-LINE SPEAKERPHONE

3500IP MWD5 (5 GSK)	35V510S5D3 (ClGr) / 35V110S5D3 (Blk)
3500IP MWD (10 GSK)	35V510S10D3 (ClGr) / 35V110S10D3 (Blk)

VOIP TWO-LINE SPEAKERPHONE (WITH USB)

3502IP MWD5 (5 GSK)	35V520S5DU3 (ClGr) / 35V120S5DU3 (Blk)
3502IP MWD (10 GSK)	35V520S10DU3 (ClGr) / 35V120S10DU3 (Blk)

VOIP TWO-LINE SPEAKERPHONE

3502IP MWD5 (5 GSK)	35V520S5D3 (ClGr) / 35V120S5D3 (Blk)
3502IP MWD (10 GSK)	35V520S10D3 (ClGr) / 35V120S10D3 (Blk)

VOIP TRIMLINE

3500TRM-IP (1 Line)	35V510N0T3 (ClGr) / 35V110N0T3 (Blk)
3502TRM-IP (2 Line)	35V520N0T3 (ClGr) / 35V120N0T3 (Blk)

ANALOG SINGLE-LINE NON-SPEAKERPHONE (WITH USB)

3500MW3 (3 GSK)	35A510N3DU (ClGr) / 35A110N3DU (Blk)
3500MW5 (5 GSK)	35A510N5DU (ClGr) / 35A110N5DU (Blk)
3500MW10 (10 GSK)	35A510N10DU (ClGr) / 35A110N10DU (Blk)

ANALOG SINGLE-LINE NON-SPEAKERPHONE

3500LBY (0 GSK)	35A50N0L (ClGr) / 35A10N0L (Blk)
3500MWB (0 GSK)	35A510N0D (ClGr) / 35A110N0D (Blk)
3500MW3 (3 GSK)	35A510N3D (ClGr) / 35A110N3D (Blk)
3500MW5 (5 GSK)	33A510N5D (ClGr) / 35A110N5D (Blk)
3500MW10 (10 GSK)	35A510N10D (ClGr) / 35A110N10D (Blk)

ANALOG SINGLE-LINE SPEAKERPHONE (WITH USB)

3500MWS (0 GSK)	35A510S0DU (ClGr) / 35A110S0DU (Blk)
3500MWD3 (3 GSK)	35A510S3DU (ClGr) / 35A110S3DU (Blk)
3500MWD5 (5 GSK)	35A510S5DU (ClGr) / 35A110S5DU (Blk)
3500MWD (10 GSK)	35A510S10DU (ClGr) / 35A110S10DU (Blk)

ANALOG SINGLE-LINE SPEAKERPHONE

3500MWS (0 GSK)	35A510S0D (ClGr) / 35A110S0D (Blk)
3500MWD3 (3 GSK)	35A510S3D (ClGr) / 35A110S3D (Blk)
3500MWD5 (5 GSK)	35A510S5D (ClGr) / 35A110S5D (Blk)
3500MWD (10 GSK)	35A510S10D (ClGr) / 35A110S10D (Blk)

ANALOG TWO-LINE SPEAKERPHONE (WITH USB)

3502MWS (0 GSK)	35A520S0DU (ClGr) / 35A120S0DU (Blk)
3502MWD3 (3 GSK)	35A520S3DU (ClGr) / 35A120S3DU (Blk)
3502MWD5 (5 GSK)	35A520S5DU (ClGr) / 35A120S5DU (Blk)
3502MWD (10 GSK)	35A520S10DU (ClGr) / 35A120S10DU (Blk)

TELEMATRIX 9600|9400 SERIES



SMART FEATURES AND LEGENDARY PERFORMANCE.

From bold design, smart features, and legendary performance, TeleMatrix 9600 and 9400 Series cordless phones make perfect sense for you and your guests. Flat panel design complements the look of flat screen television sets in the room. Choose from 7 standard or custom color handset cradle accents to match any room decor and coordinate style with functionality. Features include patented OneTouch voicemail technology for hands-free auto-dialing and retrieval, and an integrated ethernet pass-through port for guest connectivity. AutoSync pairing automatically registers remote 9600 Series cordless handsets with the base unit when in the cradle to avoid failures from misplaced handsets. Our optional battery backup feature also helps assure guest connectivity during power outages.

9600|9400 SERIES ANALOG HIGHLIGHTS

- Available in 1 or 2-line cordless configurations
- Speakerphone
- Additional remote handsets available in 1 or 2-line
- OneTouch voicemail retrieval technology
- 5 or 10 programmable guest service keys
- Compatible with all major PABX systems
- 3-way conference calling (2-line models only)
- Convenient data port
- Choose 1.8 GHz or 1.9 GHz frequency
- Full-length customizable faceplates
- Industrial grade construction with matte finish
- Non-slip base

9600 SERIES VOIP HIGHLIGHTS

- Available in 1 or 2-line cordless configurations
- Speakerphone
- Additional remote handsets available in 1 or 2-line
- OneTouch voicemail retrieval technology
- 5 or 10 programmable guest service keys
- Compatible with all major PABX systems
- 3-way conference calling (2-line models only)
- Convenient data port
- Choose 1.8 GHz, 1.9 GHz, or 2.4 GHz frequency
- Full-length customizable faceplates
- Industrial grade construction with matte finish
- Non-slip base

TELEMATRIX 9600|9400



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL



VoIP AND ANALOG
MODELS AVAILABLE



Ash



Black

Matching RediDock
Cordless available.



9600|9400 SERIES SPECIFICATIONS

Standard Colors:	Black or Ash
Faceplate Size:	Full length
Packaging:	10 per carton
Footprint:	9.5" (241.30mm) (l) x 3.5" (88.90mm) (h) x 6.75" (171.45mm) (w)
Weight:	3.6lbs. (1632g)
Line Voltage:	24-52 VDC (+/-)
Line Current:	20mA-100mA Auto detect for 90 VDC Neon or Low Voltage LED
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance:	ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence:	1.3dB
Max Power Output:	18.11 dBm
Antenna Gain:	0 dBi
Frequency Range (9600):	1.8GHz and 1.9GHz
Frequency Range (9400):	2.4 GHz (2400-2480.544 MHz)
Handset:	ADA/FCC Hearing Aid Compliant
Line Cord:	RJ45 Line Cords—12 ft/3.66 m
Line Cord (Analog):	RJ14 Line Cord—12 ft/3.66 m

HANDSET CRADLE INSERT COLORS

For an additional charge, choose from seven handset cradle insert color options to match your brand, office, or guest room decor. For handset insert color part numbers, add the following suffixes at the end of the ash or black part number.

Orange = ORG / Blue = BLU / Lime = LIM / White = WHI / Gray = GRA Ochre = OCH / Red = RED
 Example: 9600MWD Black w/ Red Insert = 965591NRED



PART NUMBERS

VOIP SINGLE-LINE SPEAKERPHONE

9600IPMWD5 (5 GSK)	96V21319S5D3(Ash) / 96V11319S5D3 (Blk)
9600IPMWD (10 GSK)	96V21319S10D3(Ash) / 96V11319S10D3 (Blk)

VOIP TWO-LINE SPEAKERPHONE

9602IPMWD5 (5 GSK)	96V22319S5D3(Ash) / 96V12319S5D3 (Blk)
9602IPMWD (10 GSK)	96V22319S10D3(Ash) / 96V12319S10D3 (Blk)

VOIP REMOTE HANDSETS

Handset Kit IP - 1 Line	96V21319N0HK3(Ash) / 96V11319N0HK3 (Blk)
Handset Kit IP - 2 Line	96V22319N0HK3(Ash) / 96V12319N0HK3 (Blk)

ANALOG SINGLE-LINE SPEAKERPHONE

9600MWD5 (5 GSK)	96459-N(Ash) / 964591-N (Blk)
9600MWD (10 GSK)	96559-N(Ash) / 965591-N (Blk)
9402MWD5 (5 GSK)	934591-N (Blk) / 93459-N (Ash)
9402MWD (10 GSK)	935591-N (Blk) / 93559-N (Ash)

ANALOG TWO-LINE SPEAKERPHONE

9602MWD5 (5 GSK)	98459-N(Ash) / 984591-N (Blk)
9602MWD (10 GSK)	98559-N(Ash) / 985591-N (Blk)
9400MWD5 (5 GSK)	924591-N (Blk) / 92459-N(Ash)
9400MWD (10 GSK)	925591-N (Blk) / 92559-N (Ash)

ANALOG REMOTE HANDSETS

9600 Handset Kit - 1 Line	965591HDKIT-N(Ash) / 965591HDKIT-N (Blk)
9400 Handset Kit - 1 Line	265591HDKIT-N(Blk) / 925591HDKIT-N (Ash)
9600 Handset Kit - 2 Line	985591HDKIT-N(Ash) / 985591HDKIT-N (Blk)
9400 Handset Kit - 2 Line	385591HDKIT-N (Blk) / 935591HDKIT-N (Ash)

PACKAGE CONTENTS

- 9600 or 9400 Series base
- Handset
- RJ45 line cord
- RJ14 line cord, 12 ft/3.66 m (Analog)
- AC Adapter (Analog)
- Faceplates for handset & base
- Overlays for handset & base



Teledex 9600-9400 Series VoIP models feature a 1-year limited warranty.



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

TELEMATRIX 3300 SERIES



SMART FEATURES AND LEGENDARY PERFORMANCE.

From bold design, smart features, and legendary performance, Telematrix 3300 Series corded phones make perfect sense for you and your guests. Flat panel design complements the look of flat screen television sets in the room. Choose from 7 standard or custom color handset cradle accents to match any room decor and coordinate style with functionality. Features include patented OneTouch voicemail technology for hands-free auto-dialing and retrieval, and an integrated Ethernet pass-through port for guest connectivity. VoIP and analog CID configurations have an LCD screen. Matching Trimlines available.

3300 SERIES ANALOG HIGHLIGHTS

- Available in 1 or 2-line corded configurations
- Speakerphone or non-speakerphone
- OneTouch voicemail retrieval technology (message-waiting light only on 3300LBY & 3300MWB)
- 0, 3, 5, or 10 programmable guest service keys
- Compatible with all major PABX systems
- 3-way conference calling (2-line models only)
- Convenient data port
- Full-length customizable faceplates
- Industrial grade construction with matte finish
- Non-slip base
- Optional wall-mount bracket available separately.

3300 SERIES VOIP HIGHLIGHTS

- Available in 1 or 2-line corded configurations
- Speakerphone or non-speakerphone
- LCD screen to display caller ID
- OneTouch voicemail retrieval technology
- 0, 5, or 10 programmable guest service keys
- Compatible with all major PABX systems
- 3-way conference calling (2-line models only)
- Dual-Port 10/100Mbps ethernet port for HSIA
- Full-length customizable faceplates
- Industrial grade construction with matte finish
- Non-slip base
- Optional wall-mount bracket available separately.

TELEMATRIX 3300 SERIES



PROGRAMMABLE GUEST SERVICE KEYS



PATENTED ONETOUCH MESSAGE RETRIEVAL



VoIP AND ANALOG MODELS AVAILABLE



Ash



Black

Matching Trimline model available



3300 SERIES SPECIFICATIONS

Standard Colors:	Ash or Black
Faceplate Size:	Full length
Footprint:	8.5" (215.9mm) (l) x 3.5" (88.9mm) (h) x 6.75" (171.45mm) (w)
Footprint (Trimline):	9.75" (247.65mm) (l) x 2.5" (63.5mm) (h) x 3.25" (82.55mm) (w)
Weight:	3.6lbs. (1632g)
Line Voltage:	24-52VDC (+/-)
Line Current:	20mA-100mA Auto detect for 90VDC Neon or Low Voltage LED
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref. CE ETL
Compliance:	ADA/FCC Hearing Aid Compliant RoHS Environmentally Compliant
Ringer Equivalence:	1.3dB
Max Power Output:	18.11 dBm
Handset:	ADA/FCC Hearing Aid Compliant
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Line Cord (VoIP):	RJ45 Line Cord—12 ft/3.66 m
Packaging:	10 per carton
Packaging (Trimline):	20 per carton

HANDSET CRADLE INSERT COLORS

For an additional charge, choose from seven handset cradle insert color options to match your brand, office, or guest room decor. For handset insert color part numbers, add the following suffixes at the end of the ash or black part number.

Orange = ORG / Blue = BLU / Lime = LIM / White = WHI / Gray = GRA Ochre = OCH / Red = RED
 Example: 3300MWD Black w/ Red Insert = 333391NRED



Teledex 3500 Series Analog models feature a 5-year limited warranty.



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

PART NUMBERS

VOIP SINGLE-LINE NON-SPEAKERPHONE	
3300IP LBY (0 GSK, Lobby)	33V20N0L3(Ash) / 33V10N0L3(Blk)
3300IP MWB (0 GSK)	33V210N0D3(Ash) / 33V110N0D3(Blk)

VOIP SINGLE-LINE SPEAKERPHONE	
3300IP MWD5 (5 GSK)	33V210S5D3(Ash) / 33V110S5D3(Blk)
3300IP MWD (10 GSK)	33V210S10D3(Ash) / 33V110S10D3(Blk)

VOIP TWO-LINE SPEAKERPHONE	
3302IP MWD5 (5 GSK)	33V220S5D3(Ash) / 33V120S5D3(Blk)
3302IP MWD (10 GSK)	33V220S10D3(Ash) / 33V120S10S3(Blk)

VOIP TRIMLINE	
3300TRM-IP (1 Line)	33V210N3T3(Ash) / 33V110N3T3(Blk)
3302TRM-IP (2 Line)	33V220N3T3(Ash) / 33V120N3T3(Blk)

ANALOG SINGLE-LINE NON-SPEAKERPHONE	
3300LBY (0 GSK)	33009(Ash) / 330091(Blk)
3300MWB (0 GSK)	33039(Ash) / 330391(Blk)
3300MW5 (5 GSK)	33139(Ash) / 331391(Blk)
3300MW10 (10 GSK)	33239(Ash) / 332391(Blk)

ANALOG SINGLE-LINE SPEAKERPHONE	
3300MWD5 (5 GSK)	33149(Ash) / 331491(Blk)
3300MWD (10 GSK)	33339(Ash) / 333391(Blk)

ANALOG TWO-LINE SPEAKERPHONE	
3302MWD5 (5 GSK)	34149(Ash) / 341491(Blk)
3302MWD (10 GSK)	34359(Ash) / 343591(Blk)
3302CID5 (5 GSK)	34849(Ash) / 348491(Blk) (Special Order)
3302CID (10 GSK)	34859(Ash) / 348591(Blk) (Special Order)

ANALOG TRIMLINE	
3300TRM (1 Line)	33119(Ash) / 331191(Blk)
3302TRM (2 line)	34159(Ash) / 341591(Blk)

PACKAGE CONTENTS

- 3300 Series base & Handset
- RJ45 line cord (VoIP)
- RJ14 line cord, 12 ft/3.66 m (Analog)
- Faceplate and overlay

TELEMATRIX 3100 SERIES



TELEMATRIX 3100 SERIES

ELEGANT CONTOURS. BUDGET FRIENDLY.

An excellent combination of style and economy, TeleMatrix 3100 Series telephones feature a unique sweeping contour design, along with a rich telephony feature set that makes this phone perfect for all of your analog corded guestroom applications. TeleMatrix 3100 Series phones, familiar to the hospitality industry with a design that sets it apart from your everyday guestroom phone, are available with 0, 3, 5, or 10 programmable guest service keys, an optional speakerphone, a large customizable faceplate area, and patented OneTouch message-retrieval technology.

3100 SERIES HIGHLIGHTS

- Optional professional quality speakerphone
- OneTouch voicemail retrieval button technology on most models
- 0, 3, 5, or 10 programmable guest service keys
- Compatible with all major PBX systems
- 3-way conference calling (2-line models only)
- Convenient data port
- 3-step speaker and handset volume control
- High/Low ringer volume switch
- Full-length custom-tailored faceplates
- Industrial grade construction with matte finish
- Non-slip base
- Optional wall-mount bracket available separately.



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL



Ash



Black

3100 SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Footprint (Nugget 3):	6.25" (15.88cm) (w) x 9.0" (22.86cm) (l) x 2" (5.08cm) (d) (w/o handset); 6.25" (15.88cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Footprint (Nugget):	4.75" (12.07cm) (w) x 9.0" (22.86cm) (l) x 2" (5.08cm) (d) (w/o handset); 4.75" (12.07cm) (w) x 9.0" (22.86cm) (l) x 3.5" (8.89cm) (d) (w/ handset)
Weight:	1.4 lbs. (630g)
Faceplate Size:	8.75" (222mm) x 3.13" (79.5mm)
Power:	Line
Operating Voltage:	.24 to 56 VDC
Humidity:	65% ± 20%
Temperature:	77°F ± 50° (25°C ± 10°C)
FCC Specifications:	FCC Part 15 Support B: 2009
Safety Standard:	ETL and CE
Handset:	Hearing Aid compatible - Standard or Euro type
Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)
Packaging:	10 per carton

PART NUMBERS

SINGLE-LINE NON-SPEAKERPHONE

3100LBY 1L, Lobby	310091 (Blk) / 31009 (Ash)
3100MWB 1L, Basic, MW	310391 (Blk) / 31039 (Ash)
3100MW5 1L, 5GSK, MW	311391 (Blk) / 31139 (Ash)

SINGLE-LINE SPEAKERPHONE

3100MWD5 1L, 5GSK, MW, Spkr	311491 (Blk) / 31149 (Ash)
3100MWD 1L, 10GSK, MW, Spkr,	313391 (Blk) / 31339 (Ash)
3100MW10 1L, 10GSK, MW	312391 (Blk) / 31239 (Ash)

TWO-LINE SPEAKERPHONE

3102MWS 2L, MW, Spkr,	320491 (Blk) / 32049 (Ash)
3102MWD5 2L, 5GSK, MW, Spkr,	321491 (Blk) / 32149 (Ash)
3102MWD 2L, 10GSK, MW, Spkr,	323591 (Blk) / 32359 (Ash)

PACKAGE CONTENTS


- 3100 Series base
- Handset
- 12-foot line cord
- 9-foot coil cord
- Faceplate and overlay



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.



TELEMATRIX RETRO SERIES



RETRO SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	N/A
Footprint (Desk):	5.5" (l) x 9.75" (w) x 6.75" (h)
Footprint (Wall):	5.5" (l) x 7.0" (w)
Weight:	2.4 lbs. (1170g)
Line Voltage:	Auto-Detect
Line Current:	20mA-80mA
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance:	ADA/FCC Hearing Aid Compliant
Ringer Equivalence:	0.6dB (2510D-e) 1.1dB (2510D/2554W/205TMW)
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 Line Cords 12 ft/3.66 m
Packaging:	6 Units, 24.0 lbs

PART NUMBERS

SINGLE-LINE PHONE	
Retro Desk	26009 (Ash) / 260091 (Blk)
Retro Wall	29009 (Ash) / 290091 (Blk)

PACKAGE CONTENTS

- Retro Series base
- Handset
- 12-ft line cord
- 10-ft coil cord



CLASSIC RETRO STYLING.

Retro Series hotel phones add timeless style and a vintage look to any guest room. Great for lobby and common areas, the Retro is not only classy and distinctive, but is always in style. Go classic! Choose Retro Series in single-line desk or wall configurations in Ash or Black.

HIGHLIGHTS

- One-line corded analog telephone
- Compatible with all major PABX systems
- 8 step handset volume control
- High/Low and On/Off ringer settings (hidden switch)
- Commercial grade construction
- Desk version or wall-mountable version

CE FC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

SCITEC AEGIS-08 SERIES



VALUE NEVER LOOKED SO GOOD.

Aegis-08 telephones, the standard for economy branded hotels, now offer improved styling and more features! These rugged, trouble-free products are all line-powered—no need for an external power plug.

HIGHLIGHTS

- One and Two-Line Telephones
- Optional Professional Quality Speakerphone
- OneTouch Voicemail Retrieval Technology (except Aegis-LB-08 & Aegis-P-08)
- 0, 3, 5, or 10 programmable guest service keys
- Compatible with All Major PBX Systems
- Soft Key Technology
- Data Port
- Full Length Custom Tailored Faceplate Area
- Industrial Grade Construction with Matte Finish Design
- Non-Slip Base
- Dual NEON/LED Message Waiting Light Bar
- 4 Step Speaker and Handset Volume Control
- High/Low Ringer Volume Switch
- HAC-Compatible Handset and ADA-Compliant Volume Control
- Speaker and Mute Keys (Speakerphone Models)
- LED On/Off Indication for Hold, Mute, and Line Keys
- Desk or Wall Mountable (optional wall mount bracket not included)



PROGRAMMABLE
GUEST SERVICE KEYS



PATENTED ONETOUCH
MESSAGE RETRIEVAL

3300 SERIES SPECIFICATIONS

Standard Colors:	Ash and Black
Faceplate Size:	Full length
Packaging:	12 per carton
Footprint:	8.75" (222.25mm) (l) x 3.00" (76.2mm) (h) x 6.00" (152.4mm) (w)
Weight:	2.5 lbs. (1170g)
Line Voltage:	Auto-Detect
Line Current:	20mA-80mA
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance:	ADA/FCC Hearing Aid Compliant
Ringer Equivalence:	0.6dB
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 (Single Line) RJ14 (Two-Line) line cord - 12 ft (3.66m)

PART NUMBERS

SINGLE-LINE NON-SPEAKERPHONE

Aegis-LB-08 Lobby 1L	80102 (Blk) / 80101 (Ash)
Aegis-P-08 1L, Basic, MW	80002 (Blk) / 80001 (Ash)
Aegis-3-08 1L, 3GSK, MW	80302 (Blk) / 80301 (Ash)
Aegis-5-08 1L, 5GSK, MW	80502 (Blk) / 80501 (Ash)
Aegis-10-08 1L, 10GSK, MW	81002 (Blk) / 81001 (Ash)

SINGLE-LINE SPEAKERPHONE

Aegis-PS-08 1L, Basic, MW, Spkr	80012 (Blk) / 80011 (Ash)
Aegis-3S-08 1L, 3GSK, MW, Spkr	88032 (Blk) / 88031 (Ash)
Aegis-5S-08 1L, 5GSK, MW, Spkr	88052 (Blk) / 88051 (Ash)
Aegis-10S-08 1L, 10GSK, MW, Spkr	88102 (Blk) / 88101 (Ash)

TWO-LINE SPEAKERPHONE

Aegis-TP-08 2L, Basic, MW	89002 (Blk) / 89001 (Ash)
Aegis-TS-08 2L, 5GSK, MW, Spkr	89052 (Blk) / 89051 (Ash)
Aegis-T-08 2L, 10GSK, MW, Spkr	89102 (Blk) / 89101 (Ash)

PACKAGE CONTENTS

- Aegis-08 Series base
- Handset
- 12-ft line cord
- 10-ft coil cord
- Faceplate and overlay



Ash



Black



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.



SCITEC EMERGENCY SERIES



ALWAYS BE PREPARED.

Scitec emergency telephones help prepare your facilities to meet the communications needs of staff and customers when time matters most. Choose the Aegis-LBE-08 with full-length red emergency faceplate or red 2510e or 2554e desk and wall sets.

HIGHLIGHTS

- One-Line Telephone
- Full-Length Red Emergency Faceplate (Aegis-LBE-08)
- Dual NEON/LED Message Waiting Light (Aegis-LBE-08)
- Wall Mount Bracket Sold Separately (Aegis-LBE-08)
- RJ11 Data Port (Aegis-LBE-08/2510e)
- Industrial Grade Construction with Matte or Gloss Finish Design
- Non-Slip Base
- Compatible with All Major PABX Systems
- Volume Control Toggle Key (Aegis-LBE-08)
- 4 Step Handset Volume Control (Aegis-LBE-08)
- High/Low Ringer Volume Control (Aegis-LBE-08/2510e)
- HAC-Compatible Handset
- ADA-Compliant Volume Control
- Available in Ash or Black (Aegis-LBE-08) or red (2510e/2554e)

EMERGENCY SERIES SPECIFICATIONS

Standard Colors:	Ash, Black and Red
Faceplate Size:	N/A
Footprint:	8.75" (l) x 4.0" (w) x 4.5" (h) (2554e) 9.0" (l) x 8.75" (w) x 5.0" (h) (2510e) 8.75" (l) x 6.0" (w) x 2.75" (h) (Aegis-LBE-08)
Weight:	2.5 lbs. (1170g)
Line Voltage:	Auto-Detect
Line Current:	20mA-80mA
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance:	ADA/FCC Hearing Aid Compliant
Ringer Equivalence:	0.6dB (Aegis-LBE-08) 1.1dB (2510e and 2554e)
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ14 line cord - 12 ft (3.66m)
Packaging:	12 Units, 31lbs/14.06kg (Aegis-LBE-08/2554e) 8 Units, 24lbs/10.89kg (2510e)

PART NUMBERS

SINGLE-LINE PHONE	
Aegis-LBE-08	80103 (Ash) / 80123 (Blk)
2510e Desk Set	25003 (Red)
2545e Wall Set	25403 (Red)

PACKAGE CONTENTS

- Emergency Series base
- Handset
- 12-ft line cord
- 10-ft coil cord



CE FCC Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

SCITEC EMERGENCY SERIES

SCITEC 2500 SERIES



2510D MW



2554W



205TMW

THE TIMELESS STANDARD.

Scitec industry standard 2500 sets are designed to operate in the most demanding work environments. In the office, warehouse or plant, on military bases, and local, state, and federal government properties, Scitec desk and wall telephones are on the job.

HIGHLIGHTS

- Single-Line Telephones
- Compatible with All Major PABX Systems
- RJ11 Data Port (2510D/2510D-e/205TMW)
- Double-Gong Bell Ringer (2510D)
- Electronic Ringer (2510D-e)
- Single-Gong Bell Ringer (2554W)
- Optional Message Waiting Light
- Flash, Redial, and Hold Keys (205TMW)
- Lighted Dial Keys (205TMW)
- Industrial Grade Construction with Matte or Gloss Finish Design
- Non-Slip Base
- HAC-Compatible Handset and ADA-Compliant
- Volume Control

2500 SERIES SPECIFICATIONS

Standard Colors:	Ash, Black and White
Faceplate Size:	Full length
Footprint:	9.0"(l) x 4.25"(w) x 6.0"(h) (2554W) 9.0"(l) x 5.5"(w) x 4.0"(h) (2510D/2510D-e) 9.0"(l) x 4.0"(w) x 4.0"(h) (205TMW)
Weight:	2.5 lbs. (1170g)
Line Voltage:	Auto-Detect
Line Current:	20mA-80mA
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance:	ADA/FCC Hearing Aid Compliant
Ringer Equivalence:	0.6dB (2510D-e) 1.1dB (2510D/2554W/205TMW)
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 Line Cords 12 ft/3.66 m (2510D/2510DMW, 2510D-e/2510D-eMW) RJ11 Line Cords 5 in/12.7 cm (205T/205TMW)
Packaging:	12 Units, 31lbs/14.06kg (2554W) 8 Units, 24lbs/10.89kg (2510D) 16 Units, 32lbs/14.51kg (205TMW)

PART NUMBERS

Single-Line Desk Set		
2510D (no MW)	25001 (Ash) / 25002 (Blk)	
2510D MW	25011 (Ash) / 25012 (Blk)	
2510D-e (no MW)	25101 (Ash)	
2510D-e MW	25111 (Ash)	
Single-Line Wall Set		
2554W (no MW)	25401 (Ash) / 25402 (Blk)	
2554W MW	25411 (Ash) / 25412 (Blk)	
Single-Line Trimline		
205TMW	20521 (Ash) / 20515 (Wht)	

PACKAGE CONTENTS

- 2500 Series base
- Handset
- 12-ft line cord
- 10-ft coil cord



Ash



Black



White

- 5-Year Warranty (2510D/2554)
- 2-Year Warranty (205TMW)
- 1-Year Warranty (2510D-e)



Features and specifications are subject to change without notice. The values for mass and dimension are approximate.



SCITEC H3000 SERIES



H3000 SERIES SPECIFICATIONS

Standard Colors:	White and Black
Faceplate Size:	N/A
Footprint:	6.25" (w) x 9.5" (l) x 3.75" (h)
Weight:	2.5 lbs. (1170g)
Line Voltage:	Auto-Detect
Line Current:	20mA-80mA
Certifications:	FCC Part 68, FCC Part 15 & UL 1459 Ref.
Compliance:	ADA/FCC Hearing Aid Compliant
Ringer Equivalence:	0.6dB
Handset Coil-Cord:	10 ft (3.048m)
Line Cord:	RJ11 line cord - 12 ft (3.66m)
Packaging:	10 per carton

PART NUMBERS

H3000 (Blk)	HA110S6D (Blk)
H3000 (Wht)	HA510S6D (Wht)

PACKAGE CONTENTS

- H3000 Series base
- Handset
- 12-ft line cord
- 10-ft coil cord



PROGRAMMABLE
BIG BUTTON KEYS



THE BIG BUTTON ADVANTAGE.

The H3000 big-GSK telephone helps guests quickly and intuitively dial for food or transportation services directly from the hotel guest room, lobby, or concierge station when you pre-program guest service keys to direct-dial on-property or local service vendors. Generate incremental revenue by leasing guest service key connections to food and service vendors. Available in single line analog models in Black or White, Scitec H3000 phones help facilitate service connections, drive revenue, and provide years of dependable time-saving service for your staff.

HIGHLIGHTS

- Single-Line Analog Speakerphone
- Compatible with All Major Analog PABX Systems
- 6 Big Programmable Speed Dial Memory Keys
- Big Dial Pad Buttons with Braille
- OneTouch Message-Waiting Button that supports high (neon) and low (LED) message-waiting signals and optional FSK message waiting
- Volume Boost Key—6 decibel volume increase in handset receiver
- Visual Ring Indicator Light Provides Hard-of-Hearing Patients with a Visual Notification of an Incoming Call
- Side-Mounted RJ11 Data-port Provides Access for Laptops and Other Devices
- Industrial Grade Construction with Matte Finish Non-Slip Base
- – 3-Step Volume Control Key & High/Low Ringer Volume Control
- HAC-Compatible Handset with ADA-Compliant Volume Control
- Desk or Wall-Mountable




Features and specifications are subject to change without notice. The values for mass and dimension are approximate.

HOTEL TELEPHONE FACEPLATES

PAPER FACEPLATES!

Choose from our palette of full-color of hotel telephone paper faceplates designed to support your hotel franchise telephone brand standards. These offer great quality at an affordable price that will fit into any budget.

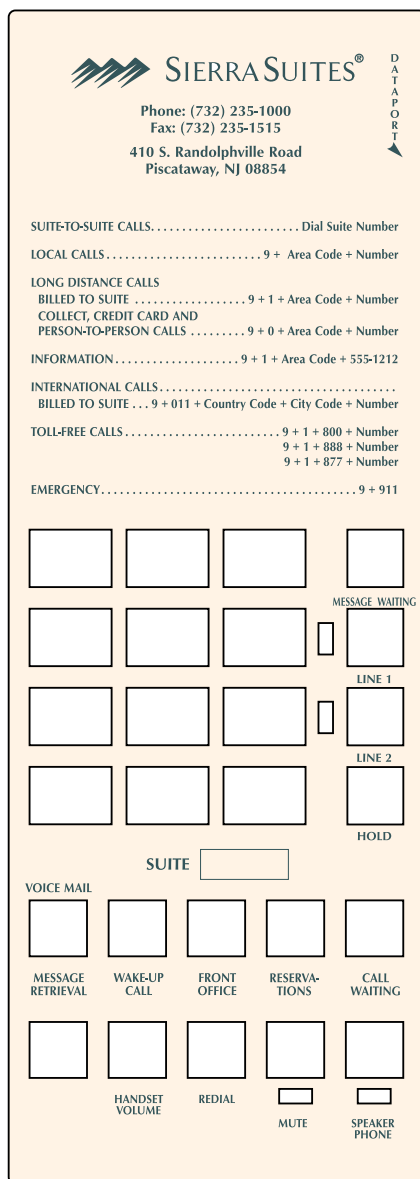

CRYSTAL HD FACEPLATES! (Waterproof!)

TOPS' Crystal HD hotel telephone faceplates are designed to meet existing and emerging hotel franchise brand standards, are waterproof, and complement the look of appliances in the guest room.

Waterproof - EASY to Disinfect! Extremely Durable



HOSPITALITY PRINTING SERVICES

Our talented staff of designers and production professionals have over 35 years experience in providing the highest quality and value in printing for the hospitality industry.

We're here to assist you in bringing your ideas to life in print, with prompt and convenient service, high quality and competitive pricing.

Tops is trusted and approved by the world's leading hotel brands. We have earned a reputation in the industry over 30 years of providing top-notch service, quality and worry-free delivery of printed products.

We speak the language of hospitality, and we're dedicated to being the best, earning your business, and making life easier for you.



- ✓ Telephone Faceplates
- ✓ Telephone Rate Cards
- ✓ Brochures and Fliers
- ✓ Permanent Labels
- ✓ Bottle Hang Tags
- ✓ Channel Guides
- ✓ Adhesive Labels
- ✓ Greeting Cards
- ✓ Business Cards
- ✓ Safety Signage
- ✓ Door Hangers
- ✓ L or A Stands
- ✓ Rack Cards
- ✓ Certificates
- ✓ Letterhead
- ✓ Table Tents
- ✓ Post Cards
- ✓ Stationery
- ✓ Invitations
- ✓ L Stands
- ✓ Menus




State-of-the-Art Digital Presses		CRISP, ACCURATE COLOR REPRODUCTION AND MINIMAL SETUP COSTS
Custom Die-Cutting in Any Shape		CLEAN, PRECISE AND CONSISTENT CUTTING AND TRIMMING
Guaranteed Quality and Service		EXPERIENCE AND HIGH STANDARDS THAT MAKE THE DIFFERENCE
Fast Turnaround and Delivery		PROMPT AND EFFICIENT PRODUCTION ON EVERY PROJECT



Printed products that enhance the guest experience



PRINTING SERVICES

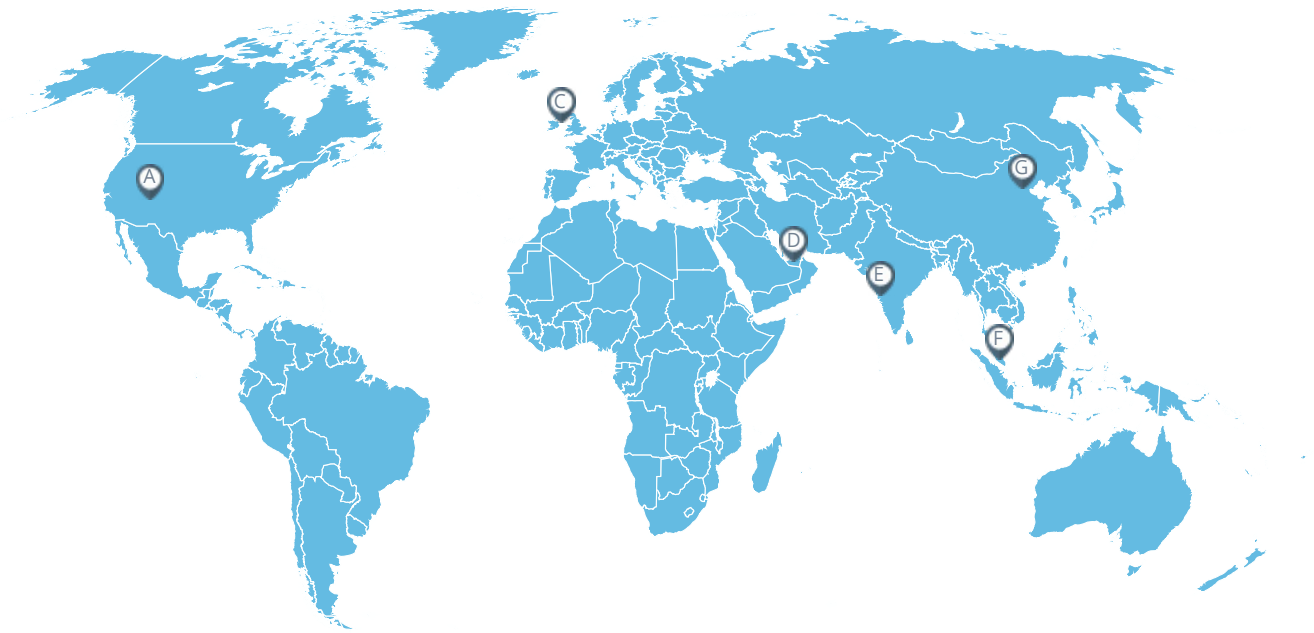

A Worldwide Headquarters
4975 N. 30th Street
Colorado Springs, CO
80919 USA
☎ +1.719.638.8821
☎ +1.719.638.8815
✉ info_USCA@cetis.com

D Middle East/Africa
609 Platinum Business Ctr.
Dubai, UAE
☎ +971 4 2806395
☎ +971 4 2806394
✉ info_ME@cetis.com

A Caribbean/Latin America
☎ +1.719.219.9180
✉ info_CALA@cetis.com

C Europe/Russia
☎ +44 (0)1908 904860
☎ +44 (0)1908 904870
✉ info_EUR@cetis.com

E India
508 Filix
Opp. Asian Paints, LBS Marg
Mumbai – 400078
India
☎ +91 22 25955535
☎ +91 22 25955534
✉ info_ME@cetis.com

F Asia/Pacific
☎ +65 96626959
✉ info_ASIA@cetis.com

G Beijing
Unit 1210, Rui-Chen Intl Centre
No.13 South Agriculture Exhibition
Centre Road
Chaoyang District
Beijing 100026
☎ +86-10-65858588
● teledex-telematrix-scitec.com
✉ info_ASIA@cetis.com

CetisGroup.com
f y t v @CetisGroup